

SITRANS FX300

Overview



SITRANS FX vortex flowmeters provide accurate volumetric and mass flow measurement of steam, gases and liquids as an all-in-one solution with integrated temperature and pressure compensation.

Benefits

- All devices have 2-wire technology and HART communication
- Temperature compensation for saturated steam as standard feature
- Integrated temperature and pressure measurement enabling direct compensation of density
- Pressure, temperature and flow can be read at a single point. No additional installation of pressure and temperature sensors
- Direct measurement of energy or energy consumption
- Optimum process reliability thanks to Intelligent Signal Processing (ISP) - stable readings, free of external perturbations
- Fully welded stainless steel construction with high corrosion, pressure and temperature resistance
- Maintenance-free sensor design
- Ready to use due to plug & play feature. No additional cabling work
- Minimal pressure drop
- Compact or remote design
- Pressure and temperature compensation for fluctuating volume flows
- Measurement of consumption in compressed air systems
- No risk of deposits or damage (sensor in the turbulent area)
- All units parameterized prior to delivery

Application

The SITRANS FX300 is a flowmeter in a single or dual transmitter version, suitable for measuring industrial steam, gases, as well as conductive and non-conductive liquids, e.g. steam (saturated steam, superheated steam), industrial gases (compressed air, nitrogen, liquefied gases, flue gases), and conductive and non-conductive liquids (demineralized water, boiler feed water, solvents, heat transfer oil).

Design

The unit is available in a compact or a remote version with up to 30 meter distance from flowmeter to transmitter. When ordering a remote version the transducer cables are pre-mounted and ready for installation.

The main applications of SITRANS FX300 can be found in the following sectors:

- Chemical
- Petrochemical
- Oil & Gas
- Power plants
 - Air
 - Heating
 - Cooling
 - Chilling
- Food & beverage
 - Pharmaceutical
 - Sugar refineries
 - Dairies
 - Breweries
 - Production of soft drinks
- Refining
- Water & waste water

3

System Overview

Version	Single transmitter			Dual transmitter
Options	Standard	Pressure sensor	Pressure sensor and isolation valve	Standard
Flange				
Sandwich				

Function

Operating Principle


SITRANS FX vortex flowmeters measure flow rate by detecting the frequency at which alternating vortices are shed from a bluff body inserted into the flow stream. This principle of measurement is known as Von Karman's vortex street principle: alternating vortices form behind an object in a stream. The frequency of the alternating vortices is proportional to the flow rate.

The passage of a vortex causes a slight stress on a pick-up placed downstream of the bluff body. The stress is picked up and counted as pressure surges by a dual Piezo crystal placed inside the wing.

Flow Measurement

SITRANS FX

SITRANS FX300

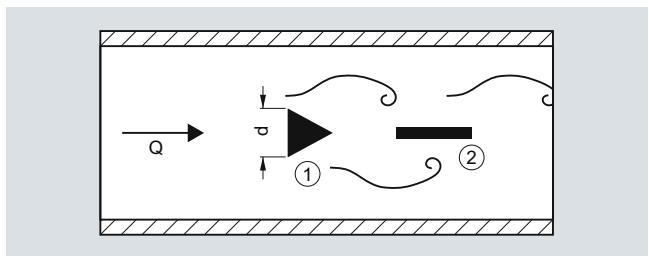

① = Bluff Body, ② = Pick-up

The flowmeter calculates the flow velocity using the following equation:

$$Q = A \cdot V = A \cdot d / St \cdot f = 101,93 \cdot f / K \text{ [m}^3/\text{h]}$$

Where:

Q = flow rate [m^3/h]

f = vortex shedding frequency [Hz]

K = calibration constant [pulses/ m^3]

d = width of the bluff body [m]

St = Strouhal Number

A = cross-section area [m^2]

V = flow velocity [m/s]

Requirements

In order to generate the vortex streets, the medium must have a minimum velocity:

- For steam and gases, the flow velocity must be 2 to 80 m/s (6.6 to 262 ft/s)
- For liquids the flow velocity must be 0.4 to 10 m/s (1.3 to 32.8 ft/s)

Design

SITRANS FX300 volumetric and mass flowmeter is available in the following configurations:

SITRANS FX300 Single transmitter

The single transmitter is available as a flange or sandwich solution in the following versions:

- Vortex standard flowmeter

Measurement with integrated temperature sensor as standard feature

- Vortex flowmeter with pressure sensor

Measurement with integrated temperature and pressure sensors for compensation of gases, wet gases, gas mixtures or steam (for energy measurement).

- Vortex flowmeter with pressure sensor and isolation valve

Allowing the pressure sensor to be shut off for the purpose of pressure or leak testing of the pipeline or for being exchanged without interrupting the process. Using the built-in two-way valve, the pressure sensor can also be calibrated and tested at a later time.

SITRANS FX300 Dual transmitter

This is a genuine redundant system with two independent sensors and two converters providing twofold functional reliability and availability of the measurement. This variant is optimally suited for measurements in multi-product pipelines.

The dual converter is available as:

- Vortex standard flowmeter

Measurement with temperature sensor for saturated steam compensation as standard feature

Technical specifications

Input

Measuring range limits

See „Dimensional Drawings“

Media pressure
1 ... 100 bar (14.5 ... 1450 psi)
(Higher pressures on request)

Output

Current output

4 ... 20 mA

- Measuring range

20.8 mA ± 1 % (105 % ± 1 %)

- Over range

- Load

- min.

- max.

100 Ω

$R_{\max} = (U_{\text{Power Supply}} - 14 \text{ V})/22 \text{ mA}$

- Error signal

NAMUR NE 43

- Maximum output

22 mA (112.5 %)

- Multidrop mode

4 mA

Digital output

HART

- Communication

FSK

- Physical layer

Transmitter

Pulse output

(Passive pulse output, needs separate power supply. Pulse output has to be defined in the Option menu Y47 totalizer or energy unit has to be entered.
E.g.: 1 pulse/kg or 1 pulse/10 m³)

- Pulse frequency

Max. 0.5 Hz

- Power supply

Min. 24 V DC as NAMUR or

open < 1 mA, max. 36 V,
closed 100 mA, U < 2 V

- Non-Ex version

open < 1 mA, max. 30 V,
closed 100 mA, U < 2 V

Accuracy

Standard version

- For liquids

- Re ≥ 20 000

± 0.75 %

- For steam and gases

- Re ≥ 20 000

± 1 %

- For steam, gases and liquids

- 10 000 < Re < 20 000

± 2 %

Pressure and temperature-compensated version

- For liquids

- 10 000 < Re < 20 000

± 2 %

- For gases and steam

- 10 000 < Re < 20 000

± 2.5 %

- Re ≥ 20 000

± 1.5 %

Repeatability

± 0.1 %

Installation conditions

(At different conditions, e.g. installation after control valve, bends or reductions, please refer to the operating instructions.)

- Inlet run

≥ 20 x DN

- Outlet run

≥ 5 x DN

Software		Design	
Uncompensated for gases, steam and liquids, but temperature-compensated for saturated steam	Order option 1	Material	AISI 316L (1.4404)/ AISI 316L (1.4435)
Density-compensated by temperature and pressure for superheated steam, no energy calculation	Order option 4	• Sensor: house/pick-up	Hastelloy C22/2.4602 available on request (contact your local Siemens representative)
Gross heat When the device has to operate as an energy calculation device	Order option 5	• Housing: transmitter	Aluminum for increased requirements
In options Y51 to Y56 add information regarding:	<ul style="list-style-type: none"> • Y51 Variable current output • Y52 Power unit Select one of the following units from power units table in Y52: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom) • Y53 Fullscale power value • Y54 Variable pulse output • Y55 Totalizer on/off • Y56 Configures for totalizer select one of the following units from energy units table in Y56: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom). 	• Sensor gaskets: for pick-up and pressure sensor	AISI 316L (1.4435) / FPM or FFKM FPM (Viton) by steam and non-aggressive gases. FFKM (Kalrez) by chlorine and other aggressive gases (only available together with a pressure sensor).
Gases and wet gases	Order option 7	Process connections	Flange norm EN 1092-1 form B1/B2 or ASME B16.5 RF.
Wet gases	Select Y49 and enter relative humidity in %		Other flanges on request (contact your local Siemens representative)
FAD - Free Air Delivery When the device has to operate close to a compressor	Order option 8	• Flange version	DN 15 ... 300 (½ ... 12")
In Y81 to Y87 add information regarding:	<ul style="list-style-type: none"> • Y81 Inlet suction temperature • Y82 Atmosphere pressure • Y83 Pressure drop at inlet filter • Y84 Inlet relative humidity • Y85 Actual revolutions per minute (of compressor) • Y86 Rated rpm of compressor • Y87 Outlet relative humidity. This information is available from compressor supplier. 	• Sandwich version	DN 15 ... 100 (½ ... 4")
Mixed gases	When the fluid is a gas mixture, contact your local Siemens representative and provide gas names and amount in %.	Degree of protection	IP66/IP67
Rated operation conditions		Dimensions and weights	See "Dimensional Drawings"
Ambient temperature		Display and operating interface	
• Non-Ex version	-40 ... +85 °C (-40 ... +185 °F)	Local display	2 lines, 10 characters per line
• Ex version	-40 ... +65 °C (-40 ... +149 °F)	Languages	German, English, French
Storage temperature	-50 ... +85 °C (-58 ... +185 °F)	Power supply	
Media temperature	-40 ... +240 °C (-40 ... +464 °F)	• Standard version	14 ... 36 V DC
Density	Taken into consideration when rating	• Ex version	14 ... 30 V DC
Viscosity	<10 cP	Certificates and approvals	
Reynolds number	10 000 ... 2 300 000	Explosion protection	
Media pressure limit	Max. 100 bar (1450 psi) Higher pressure on request (contact your local Siemens representative)	• ATEX	II 2G EEx d ia [ia] IIC T6
		• FM US/C	Class I, II, III, Div. 1 and 2
		Calibration	
		All flowmeters will be delivered with a 3 point calibration certificate	
		Material Certificate	
		Certificate of compliance, pressure test, material certificate, material in acc. of NACE and PMI of pressure bearing metal parts.	
		Cleaning	
		Choose Cleaning Class1 when fluid is oxygen or contains chloride.	
		Certificates	
		X-ray test on pressurized weldings and dye penetration test on pressure bearing weldings	
		Dye penetration test	

Flow Measurement

SITRANS FX

SITRANS FX300

3

Selection and Ordering data

SITRANS FX300 Flanged
Single transmitter and $T_{max} = 240\text{ }^{\circ}\text{C}$ (464 $^{\circ}\text{F}$)

Connection size

Connection size	Sensor size	Order No.
DN 15 (1/2")	DN 15	1 A
DN 25 (1")	DN 25	2 B
DN 40 (1 1/2")	DN 40	2 K
DN 50 (2")	DN 50	2 R
DN 80 (3")	DN 80	3 L
DN 100 (4")	DN 100	3 S
DN 150 (6")	DN 150	4 M
DN 200 (8")	DN 200	4 T
DN 250 (10")	DN 250	4 W
DN 300 (12")	DN 300	5 E

Flange norm and nominal pressure

Form B1/B2 EN 1092-1

PN 10	DN 200 ... 300	A
PN 16	DN 50 ... 300	B
PN 25	DN 200 ... 300	C
PN 40	DN 15 ... 300	D
PN 63	DN 50 ... 150	E
PN 100	DN 15 ... 150	F
RF	ASME B16.5	
150 lb	1/2 ... 12"	J
300 lb	1/2 ... 12"	K
600 lb	1/2 ... 6"	L

Sensor material/Gasket

St. steel AISI 316L (1.4404)/AISI 316L (1.4435)/ FPM	1
St. steel AISI 316L (1.4404)/AISI 316L (1.4435)/ FFKM	5

Transmitter design

Compact version - no cable	1
----------------------------	---

Approval and cable gland

Non-Ex, M20 x 1.5	1
Non-Ex, 1/2" NPT	2
IEC Ex, M20 x 1.5	3
ATEX, M20 x 1.5	4
ATEX, 1/2" NPT	5
FM US/C, M20 x 1.5	6
FM US/C, 1/2" NPT	7
IEC Ex, 1/2" NPT	8

Transmitter, display and communication

With display, HART	A
--------------------	---

Pressure sensor and isolation valve

Without pressure sensor	A
With pressure sensor, range:	
4 bar (58 psi)	B
6 bar (87 psi)	D
10 bar (145 psi)	E
16 bar (232 psi)	G
25 bar (363 psi)	H
40 bar (580 psi)	K
60 bar (870 psi)	L
100 bar (1450 psi)	N
With isolation valve and pressure sensor, range:	
4 bar (58 psi)	P
6 bar (87 psi)	Q
10 bar (145 psi)	R
16 bar (232 psi)	S
25 bar (363 psi)	U
40 bar (580 psi)	V
60 bar (870 psi)	W
100 bar (1450 psi)	Y

Selection and Ordering data

SITRANS FX300 Flanged
Single transmitter and $T_{max} = 240\text{ }^{\circ}\text{C}$ (464 $^{\circ}\text{F}$)

Software

Uncompensated for gases, wet gases, steam and liquids, respectively, temperature compensation for saturated steam	1
Density compensation for superheated steam	4
Density compensation for superheated steam and setting of Gross heat Opt. Y51 ... Y56 for Energy measuring	5
Density compensation for gases and wet gases and setting of Relative humidity at opt. Y49	7
Density compensation for gases, wet gases and setting of FAD - free air delivery Opt. Y49 and Y81 ... Y87 for Compressor settings	8

Selection and Ordering data	Order code
Additional information Please add “-Z” to Order No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.	
Input process data Medium: Specify steam, gas, liquid or customised Temperature: Specify max. operating temperature and units Pressure: Specify max. operating pressure and units Density (only by customer-specified medium): Specify medium density and units Viscosity (only by customer-specified medium): Specify medium viscosity and units Flow rate: Specify min./max. flow rate and units Setting of pulse output: Specify totalizer or energy unit (1 pulse/unit) Relative humidity (amount in % of process medium)	Y40 Y41 Y42 Y43 Y44 Y45 Y47 Y49
Settings of gross heat Variable current output Power unit (specify: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom)) Fullscale power value Variable pulse output Totalizer on/off Configure totalizer (specify: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom))	Y51 Y52 Y53 Y54 Y55 Y56
Settings of FAD Inlet suction temperature Atmosphere pressure Pressure drop filter Inlet relative humidity Actual revolutions per minute (of compressor) Rated Rpm of compressor Outlet relative humidity This information is available from compressor supplier.	Y81 Y82 Y83 Y84 Y85 Y86 Y87

Operating instructions

Description	Order No.
English	A5E2100423

This device is shipped with a Quick Start guide and a CD containing further SITRANS F literature.

All literature is also available for free at:
<http://www.siemens.com/flowdocumentation>

Selection and Ordering data	Order code
Further designs Please add “-Z” to Order No. and specify Order code.	
Converter housing material Aluminum for increased requirement, color: petrol green	A10
Material certificate Certificate of compliance EN 10204-2.1 Pressure test + 3.1 accordance EN 10204 Material certificate pressure parts + certificate 3.1 Material in accordance with NACE MR 0175-01 PMI of pressure bearing metal parts + certificate 3.1 Material certificate pressure parts + PMI/certificate 3.1	C10 C11 C12 C13 C14 C15
Calibration certificate FX300 As standard the flow device has a 3-point calibration certificate. Calibration certificate (5 point)	D11
Hardness test Hardness test on pressure bearing parts + 3.1 Equotip LD procedure according to NACE MR 0175-01	H30
Cleaning for oil and fat Class 1 increased requirement (customer-specified) and 3.1 (EN 10204) Class 2 and 3.1 (EN 10204)	K46 K48
Certificates X-ray test on pressure bearing weldings Dye penetration test on pressure bearing weldings	M56 M58
Tag name plate Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text) Stainless steel tag with 2.5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text)	Y17 Y18

Flow Measurement

SITRANS FX

SITRANS FX300

3

Selection and Ordering data

SITRANS FX300 Sandwich
Single transmitter and $T_{max} = 240\text{ }^{\circ}\text{C}$ (464 $^{\circ}\text{F}$)

Order No.

7 ME 2 7 0 0 -

Connection size

DN 15 (1/2")

1 A

DN 25 (1")

2 B

DN 40 (1 1/2")

2 K

DN 50 (2")

2 R

DN 80 (3")

3 L

DN 100 (4")

3 S

Nominal pressure

EN

PN 16 DN 50 ... 100

B

PN 40 DN 15 ... 100

D

PN 63 DN 50 ... 100

E

PN 100 DN 15 ... 100

F

ASME

150 lb 1/2 ... 4"

J

300 lb 1/2 ... 4"

K

600 lb 1/2 ... 4"

L

Sensor material/Gasket

St. steel AISI 316L (1.4404)/AISI 316L (1.4435)/FPM

1

St. steel AISI 316L (1.4404)/AISI 316L (1.4435)/FFKM

5

Transmitter design

Compact version - no cable

1

Approval and cable gland

Non-Ex, M20 x 1.5

1

Non-Ex, 1/2" NPT

2

IEC Ex, M20 x 1.5

3

ATEX, M20 x 1.5

4

ATEX, 1/2" NPT

5

FM US/C, M20 x 1.5

6

FM US/C, 1/2" NPT

7

IEC Ex, 1/2" NPT

8

Transmitter, display and communication

With display, HART

A

Pressure sensor and isolation valve

Without pressure sensor

A

With pressure sensor, range:

4 bar (58 psi)

B

6 bar (87 psi)

D

10 bar (145 psi)

E

16 bar (232 psi)

G

25 bar (363 psi)

H

40 bar (580 psi)

K

60 bar (870 psi)

L

100 bar (1450 psi)

N

With isolation valve and pressure sensor, range:

4 bar (58 psi)

P

6 bar (87 psi)

Q

10 bar (145 psi)

R

16 bar (232 psi)

S

25 bar (363 psi)

U

40 bar (580 psi)

V

60 bar (870 psi)

W

100 bar (1450 psi)

Y

Selection and Ordering data

SITRANS FX300 Sandwich
Single transmitter and $T_{max} = 240\text{ }^{\circ}\text{C}$ (464 $^{\circ}\text{F}$)

Order No.

7 ME 2 7 0 0 -

Software

Uncompensated for gases, wet gases, steam and liquids respectively temperature compensation for saturated steam

1

Density compensation for superheated steam

4

Density compensation for superheated steam and setting of Gross heat Opt. Y51 ... Y56 for Energy measuring

5

Density compensation for gases and wet gases and setting of Relative humidity at opt. Y49

7

Density compensation for gases, wet gases and setting of FAD - free air delivery Opt. Y49 and Y81 ... Y87 for Compressor settings

8

Selection and Ordering data	Order code
Additional information Please add “-Z” to Order No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.	
Input process data Medium: Specify steam, gas, liquid and customised Temperature: Specify max. operating temperature and units Pressure: Specify max. operating pressure and units Density (only by customer-specified medium): Specify medium density and units Viscosity (only by customer-specified medium): Specify medium viscosity and units Flow rate: Specify min./max. flow rate and units Setting of pulse output: Specify totalizer or energy unit (1 pulse/unit) Relative humidity (amount in % of process medium)	Y40 Y41 Y42 Y43 Y44 Y45 Y47 Y49
Settings of gross heat Variable current output Power unit (specify: kJ/h, MJ/h, GJ/h, Btu/h, kcal/h, kW, MW or special (custom)) Fullscale power value Variable pulse output Totalizer on/off Configure totalizer (specify: kJ, MJ, GJ, Btu th, kcal, kWh, MWh or special (custom))	Y51 Y52 Y53 Y54 Y55 Y56
Settings of FAD Inlet suction temperature Atmosphere pressure Pressure drop filter Inlet relative humidity Actual revolutions per minute (of compressor) Rated Rpm of compressor Outlet relative humidity This information is available from compressor supplier.	Y81 Y82 Y83 Y84 Y85 Y86 Y87

Operating instructions

Description	Order No.
English	A5E2100423

This device is shipped with a Quick Start guide and a CD containing further SITRANS F literature.

All literature is also available for free at:
<http://www.siemens.com/flowdocumentation>

Selection and Ordering data	Order code
Further designs Please add “-Z” to Order No. and specify Order code.	
Converter housing material Aluminum for increased requirement, color: petrol green	A10
Material certificate Certificate of compliance EN 10204-2.1 Pressure test + 3.1 accordance EN 10204 Material certificate pressure parts + certificate 3.1 Material in accordance with NACE MR 0175-01 PMI of pressure bearing metal parts + certificate 3.1 Material certificate pressure parts + PMI/certificate 3.1	C10 C11 C12 C13 C14 C15
Calibration certificate FX300 As standard the flow device has a 3-point calibration certificate. Calibration certificate (5-point)	D11
Hardness test Hardness test on pressure bearing parts + 3.1 Equotip LD procedure according to NACE MR 0175-01	H30
Cleaning for oil and fat Class 1 increased requirement (customer-specified) and 3.1 (EN 10204) Class 2 and 3.1 (EN 10204)	K46 K48
Certificates X-ray test on pressure bearing weldings Dye penetration test on pressure bearing weldings	M56 M58
Tag name plate Stainless steel tag with 3 mm characters, max. 2 x 8 characters (40 x 20 mm, add plain text) Stainless steel tag with 2.5 mm characters, max. 8 x 40 characters (120 x 46 mm, add plain text)	Y17 Y18

Flow Measurement

SITRANS FX

SITRANS FX300

3

Selection and Ordering data

SITRANS FX300 Flanged
Dual transmitter and $T_{max} = 240^\circ\text{C}$ (464°F)

Order No.

7 ME 2 8 0 0 -

Order code

Connection size Sensor size

DN 40 (1½")	DN 40	2 K
DN 50 (2")	DN 50	2 R
DN 80 (3")	DN 80	3 L
DN 100 (4")	DN 100	3 S
DN 150 (6")	DN 150	4 M
DN 200 (8")	DN 200	4 T
DN 250 (10")	DN 250	4 W
DN 300 (12")	DN 300	5 E

Flange norm and nominal pressure

Form B1/B2	EN 1092-1
PN 10	DN 200 ... 300
PN 16	DN 50 ... 300
PN 25	DN 200 ... 300
PN 40	DN 40 ... 300
PN 63	DN 50 ... 150
PN 100	DN 40 ... 150
RF	ASME B16.5
150 lb	1½ ... 12"
300 lb	1½ ... 12"
600 lb	1½ ... 6"

Sensor material/Gasket

Stainless steel AISI 316L (1.4404)/
AISI 316L (1.4435)/FPM
Stainless steel AISI 316L (1.4404)/
AISI 316L (1.4435)/FFKM

Transmitter design

Compact version - no cable

Approval and cable gland

Non-Ex, M20 x 1.5
Non-Ex, ½" NPT
IEC Ex, M20 x 1.5
ATEX, M20 x 1.5
ATEX, ½" NPT
FM US/C, M20 x 1.5
FM US/C, ½" NPT
IEC Ex, ½" NPT

Transmitter, display and communication


With display, HART

Pressure sensor and isolation valve

Without pressure sensor

Software

Uncompensated for gases, wet gases, steam and liquids respectively temperature compensation for saturated steam

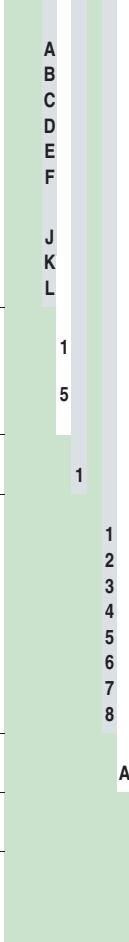

Selection and Ordering data

Additional information

Please add "-Z" to Order No. and specify as minimum Order code Y40, Y41, Y42 and Y45 and plain text.

Input process data

Medium: Specify steam, gas, liquid and customised	Y40
Temperature: Specify max. operating temperature and units	Y41
Pressure: Specify max. operating pressure and units	Y42
Density (only by customer-specified medium): Specify medium density and units	Y43
Viscosity (only by customer-specified medium): Specify medium viscosity and units	Y44
Flow rate: Specify min./max. flow rate and units	Y45
Setting of pulse output: Specify totalizer or energy unit (1 pulse/unit)	Y47
Relative humidity (amount in % of process medium)	Y49

Operating instructions for SITRANS FX300

Description	Order No.
English	A5E2100423

This device is shipped with a Quick Start guide and a CD containing further SITRANS F literature.

All literature is also available for free at:
<http://www.siemens.com/flowdocumentation>

Selection and Ordering data

Further designs

Please add "-Z" to Order No. and specify Order code.

Converter housing material

Aluminum for increased requirement,
color: petrol green

Material certificate

Certificate of compliance EN 10204-2.1	C10
Pressure test + 3.1 accordance EN 10204	C11
Material certificate pressure parts + certificate 3.1	C12
Material in accordance with NACE MR 0175-01	C13
PMI of pressure bearing metal parts + certificate 3.1	C14
Material certificate pressure parts + PMI/certificate 3.1	C15

Calibration certificate FX300

As standard the flow device has a 3-point calibration certificate.

Calibration certificate (5-point)

D11

Hardness test

Hardness test on pressure bearing parts + 3.1
Equotip LD procedure according to NACE MR 0175-01

H30

Cleaning for oil and fat

Class 1 increased requirement (customer-specified)
and 3.1 (EN 10204)

K46

Class 2 and 3.1 (EN 10204)

K48

Certificates

X-ray test on pressure bearing weldings

M56

Dye penetration test on pressure bearing weldings

M58

Tag name plate

Stainless steel tag with 3 mm characters, max. 2 x 8
characters (40 x 20 mm, add plain text)

Y17

Stainless steel tag with 2.5 mm characters, max. 8 x 40
characters (120 x 46 mm, add plain text)

Y18

SITRANS FX300 spare parts

Description	Order No.
Seal disc 21.8-12-0.1	A5E02181439
Socket only for DN 15/25 ; 1/2"	On request
Socket only for DN 15/25 ; 1"	On request
Pickup AISI 316L/1.4404	On request
O-ring pickup	A5E02181464
O-ring for pressure screw 17.13 x 2.62-FPM-70	A5E02181488
Pressure sensor 4/6/10/16/25/40/60/100 bar	On request
Cover gasket O-Ring 91.67 x 3.5	A5E02181492
Converter housing gasket 59.35.5-2-N	A5E02181495
O-ring DIN3771-20 x 1-FPM for sensor	A5E02181515
O-ring 10x2-NBR for lead- through	A5E02181525
DUBOX plug, 5-pole-RM2	A5E02181527
Electronic	
• Basic D-HART	A5E02181531
• Steam D-HART	A5E02181541
• Gas D-HART	A5E02181544
Display	A5E02181558
Cable feedthrough 10-pole (non-Ex). O-ring for cable feedthrough 21.89 x 2.62 10-pole plug	A5E02181562
Sensor replacement (incl. Seal disc, pickup, O-rings for pickup, and pressure screw	
• DN 15 (incl. 1/2" socket)	A5E02181087
• DN 25 (incl. 1" socket)	A5E02181116
• DN 40 ... 100	A5E02181152
• DN 150 ... 300	A5E02275105
Pressure sensor replacement (Incl. pressure sensor, DUBOX plug, 2 O-rings and calibration certificate)	
• 4 bar (58 psi)	A5E02181157
• 6 bar (87 psi)	A5E02181175
• 10 bar (145 psi)	A5E02181180
• 16 bar (232 psi)	A5E02181221
• 25 bar (363 psi)	A5E02181307
• 40 bar (580 psi)	A5E02181316
• 60 bar (870 psi)	A5E02181322
• 100 bar (1450 psi)	A5E02181437

Description


Order No.

Service Toolbox for changing
software (basic, steam and
gas) and different settings in
the electronic


A5E02375819



Schematics

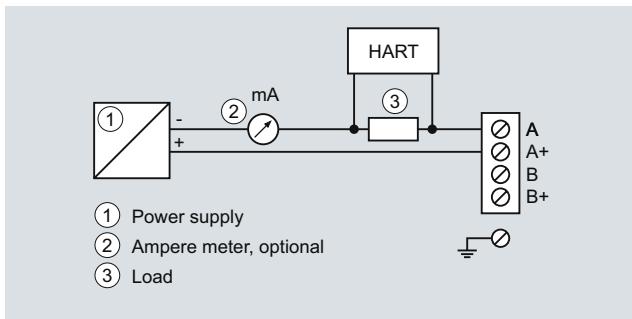

Load for HART communication

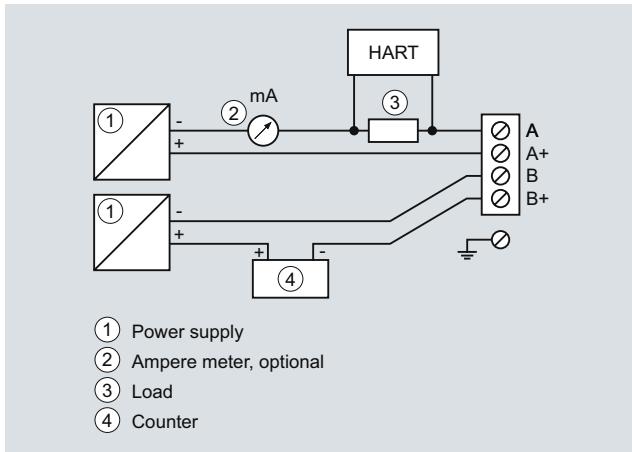


Connection pulse output

Flow Measurement


SITRANS FX

SITRANS FX300


3

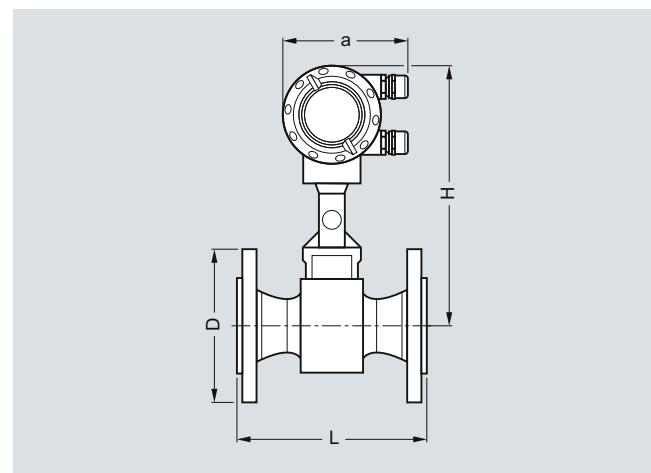


Flange version, frontal view, $a = 133 \text{ mm (5.24 inch)}$

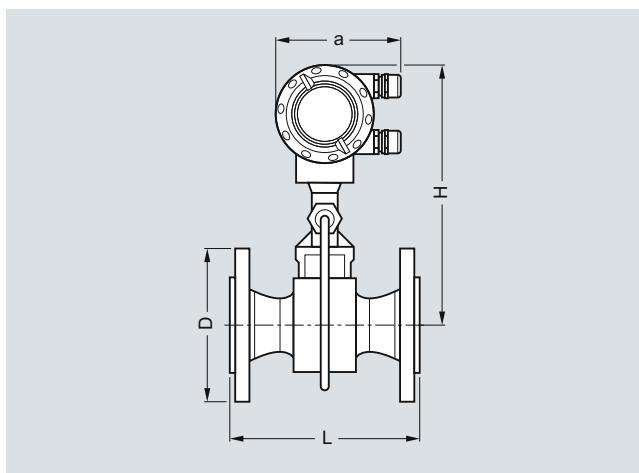


Flange version with pressure sensor, frontal view,
 $a = 133 \text{ mm (5.24 inch)}$

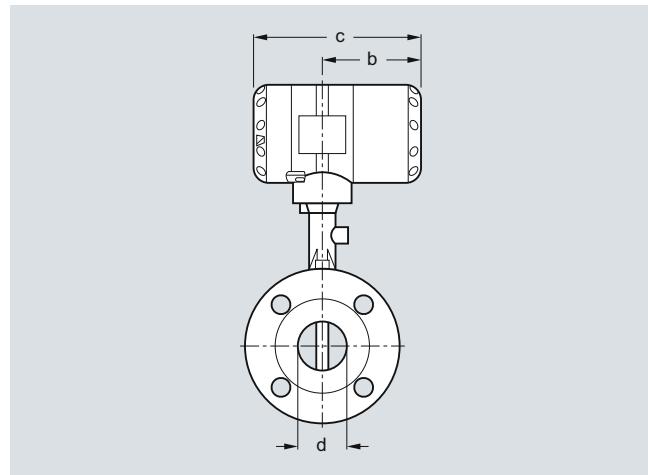

Flange version, side view, $b = 105 \text{ mm (4.13 inch)}$,
 $c = 179 \text{ mm (7.05 inch)}$

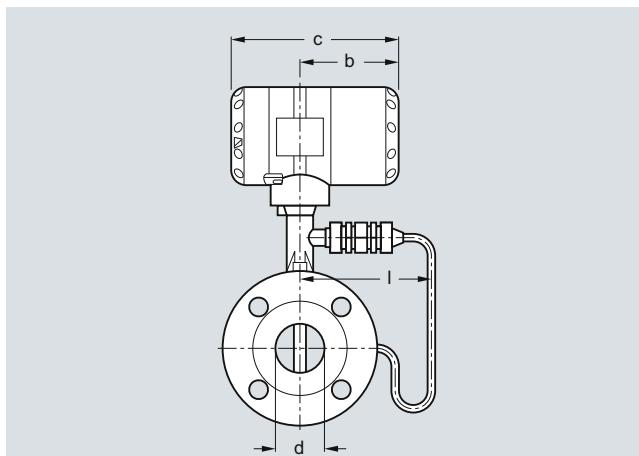

Flange version with pressure sensor, side view,
 $b = 105 \text{ mm (4.13 inch)}$, $c = 179 \text{ mm (7.05 inch)}$

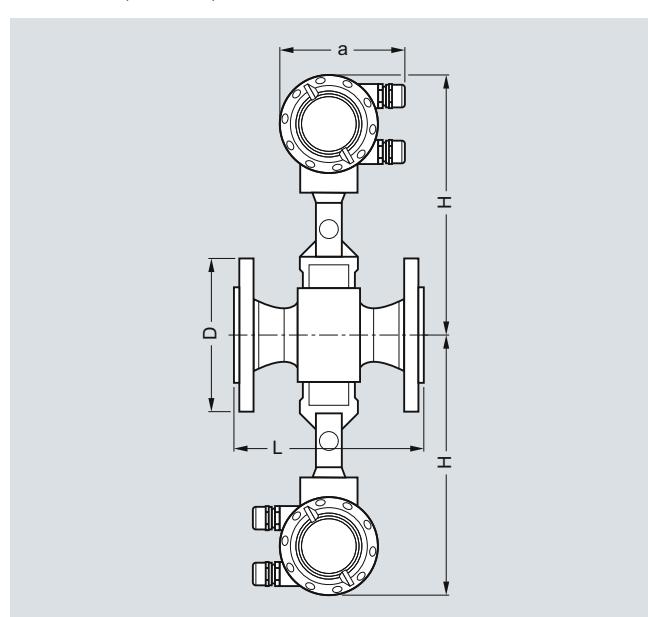

Flange version, dual converter, specified weight + 2.80 kg (6.17 lb)

Flange version EN1092-1

Size DN	Pressure rating PN	Dimensions [mm (inch)]					Weight [kg (lb)]	
		d	D	L	H	I	Flowmeter (without pres- sure sensor)	Flowmeter (with pressure sensor)
15	40	17.3 (0.68)	95 (3.74)	200 (7.87)	265 (10.43)	144 (5.67)	5.5 (12.13)	6.1 (13.45)
15	100	17.3 (0.68)	105 (4.13)	200 (7.87)	265 (10.43)	144 (5.67)	6.5 (14.33)	7.1 (15.65)
25	40	28.5 (1.12)	115 (4.53)	200 (7.87)	265 (10.43)	144 (5.67)	7.3 (16.09)	7.9 (17.42)
25	100	28.5 (1.12)	140 (5.51)	200 (7.87)	265 (10.43)	144 (5.67)	9.3 (20.50)	9.9 (21.83)
40	40	43.1 (1.70)	150 (5.91)	200 (7.87)	270 (10.63)	144 (5.67)	10.2 (22.49)	10.8 (23.81)
40	100	42.5 (1.67)	170 (6.69)	200 (7.87)	270 (10.63)	144 (5.67)	14.2 (31.31)	14.8 (32.63)
50	16	54.5 (2.15)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	12.1 (26.68)	12.7 (28.00)
50	40	54.5 (2.15)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	12.3 (27.12)	12.9 (28.44)
50	63	54.5 (2.15)	180 (7.09)	200 (7.87)	275 (10.83)	144 (5.67)	16.3 (35.94)	16.9 (37.26)
50	100	53.9 (2.12)	195 (7.68)	200 (7.87)	275 (10.83)	144 (5.67)	17.8 (39.24)	18.4 (40.57)
80	16	82.5 (3.25)	200 (7.87)	200 (7.87)	290 (11.42)	154 (6.06)	16.8 (37.04)	17.4 (38.36)
80	40	82.5 (3.25)	200 (7.87)	200 (7.87)	290 (11.42)	154 (6.06)	18.8 (41.45)	19.4 (42.77)
80	63	81.7 (3.22)	215 (8.46)	200 (7.87)	290 (11.42)	154 (6.06)	22.8 (50.27)	23.4 (51.59)
80	100	80.9 (3.19)	230 (9.06)	200 (7.87)	290 (11.42)	154 (6.06)	26.8 (59.08)	27.4 (60.41)
100	16	107.1 (4.22)	220 (8.66)	250 (9.84)	310 (12.20)	164 (6.46)	21.4 (47.18)	22 (48.50)
100	40	107.1 (4.22)	235 (9.25)	250 (9.84)	310 (12.20)	164 (6.46)	24.4 (53.79)	25 (55.12)
100	63	106.3 (4.19)	250 (9.84)	250 (9.84)	310 (12.20)	164 (6.46)	29.4 (64.82)	30 (66.14)
100	100	104.3 (4.11)	265 (10.43)	250 (9.84)	310 (12.20)	164 (6.46)	35.4 (78.04)	36 (79.37)
150	16	159.3 (6.27)	285 (11.22)	300 (11.81)	325 (12.80)	174 (6.85)	35.2 (77.60)	35.8 (78.93)
150	40	159.3 (6.27)	300 (11.81)	300 (11.81)	325 (12.80)	174 (6.85)	41.2 (90.83)	41.8 (92.15)
150	63	157.1 (6.19)	345 (13.58)	300 (11.81)	325 (12.80)	174 (6.85)	59.2 (130.51)	59.8 (131.84)
150	100	154.1 (6.07)	355 (13.98)	300 (11.81)	325 (12.80)	174 (6.85)	67.2 (148.15)	67.8 (149.47)
200	10	206.5 (8.13)	340 (13.39)	300 (11.81)	350 (13.78)	194 (7.64)	37.8 (83.33)	38.4 (84.66)
200	16	206.5 (8.13)	340 (13.39)	300 (11.81)	350 (13.78)	194 (7.64)	37.8 (83.33)	38.4 (84.66)
200	25	206.5 (8.13)	360 (14.17)	300 (11.81)	350 (13.78)	194 (7.64)	46.8 (103.18)	47.4 (104.50)
200	40	206.5 (8.13)	375 (14.76)	300 (11.81)	350 (13.78)	194 (7.64)	54.8 (120.81)	55.4 (122.14)
250	10	260.4 (10.25)	395 (15.55)	380 (14.96)	370 (14.57)	224 (8.82)	57.4 (126.55)	58.0 (127.87)
250	16	260.4 (10.25)	405 (15.94)	380 (14.96)	370 (14.57)	224 (8.82)	58.4 (128.75)	59.0 (130.07)
250	25	258.8 (10.19)	425 (16.73)	380 (14.96)	370 (14.57)	224 (8.82)	74.4 (164.02)	75.0 (165.35)
250	40	258.8 (10.19)	450 (17.72)	380 (14.96)	370 (14.57)	224 (8.82)	92.4 (203.71)	93.0 (205.03)
300	10	309.7 (12.19)	445 (17.52)	450 (17.72)	395 (15.55)	244 (9.61)	75.7 (166.89)	76.3 (168.21)
300	16	309.7 (12.19)	460 (18.11)	450 (17.72)	395 (15.55)	244 (9.61)	82.2 (181.22)	82.8 (182.54)
300	25	307.9 (12.12)	485 (19.09)	450 (17.72)	395 (15.55)	244 (9.61)	98.7 (217.60)	99.3 (218.92)
300	40	307.9 (12.12)	515 (20.28)	450 (17.72)	395 (15.55)	244 (9.61)	127.5 (281.09)	128.1 (282.41)

Flow Measurement


SITRANS FX

SITRANS FX300


3

Flange version ASME B16.5


Size DN	Pressure rating Class	Dimensions [mm (inch)]					Weight [kg (lb)]	
		d	D	L	H	I	Flowmeter (without pressure sensor)	Flowmeter (with pressure sensor)
½	150	15.8 (0.62)	90 (3.54)	200 (7.87)	265 (10.43)	144 (5.67)	4.5 (9.92)	5.1 (11.24)
½	300	15.8 (0.62)	95 (3.74)	200 (7.87)	265 (10.43)	144 (5.67)	4.9 (10.80)	5.5 (12.13)
½	600	13.9 (0.55)	95 (3.74)	200 (7.87)	265 (10.43)	144 (5.67)	5.1 (11.24)	5.7 (12.57)
1	150	26.6 (1.05)	110 (4.33)	200 (7.87)	265 (10.43)	144 (5.67)	6.2 (13.67)	6.8 (14.99)
1	300	26.6 (1.05)	125 (4.92)	200 (7.87)	265 (10.43)	144 (5.67)	7.2 (15.87)	7.8 (17.20)
1	600	24.3 (0.96)	125 (4.92)	200 (7.87)	265 (10.43)	144 (5.67)	7.5 (16.53)	8.1 (17.86)
1½	150	40.9 (1.61)	125 (4.92)	200 (7.87)	270 (10.63)	144 (5.67)	8.3 (18.30)	8.9 (19.62)
1½	300	40.9 (1.61)	155 (6.10)	200 (7.87)	270 (10.63)	144 (5.67)	10.4 (22.93)	11 (24.25)
1½	600	38.1 (1.50)	155 (6.10)	200 (7.87)	270 (10.63)	144 (5.67)	11.4 (25.13)	12 (26.46)
2	150	52.6 (2.07)	150 (5.91)	200 (7.87)	275 (10.83)	144 (5.67)	11 (24.25)	11.6 (25.57)
2	300	52.6 (2.07)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	12.4 (27.34)	13 (28.66)
2	600	49.3 (1.94)	165 (6.50)	200 (7.87)	275 (10.83)	144 (5.67)	13.9 (30.64)	14.5 (31.97)
3	150	78 (3.07)	190 (7.48)	200 (7.87)	290 (11.42)	154 (6.06)	19.8 (43.65)	20.4 (44.97)
3	300	78 (3.07)	210 (8.27)	200 (7.87)	290 (11.42)	154 (6.06)	22.8 (50.27)	23.4 (51.59)
3	600	73.7 (2.90)	210 (8.27)	200 (7.87)	290 (11.42)	154 (6.06)	23.8 (52.47)	24.4 (53.79)
4	150	102.4 (4.03)	230 (9.06)	250 (9.84)	310 (12.20)	164 (6.46)	23.4 (51.59)	24 (52.91)
4	300	102.4 (4.03)	255 (10.04)	250 (9.84)	310 (12.20)	164 (6.46)	31.4 (69.23)	32 (70.55)
4	600	97.2 (3.83)	275 (10.83)	250 (9.84)	310 (12.20)	164 (6.46)	40.4 (89.07)	41 (90.39)
6	150	154.2 (6.07)	280 (11.02)	300 (11.81)	325 (12.80)	174 (6.85)	36.2 (79.81)	36.8 (81.13)
6	300	154.2 (6.07)	320 (12.60)	300 (11.81)	325 (12.80)	174 (6.85)	51.2 (112.88)	51.8 (114.20)
6	600	146.3 (5.76)	355 (13.98)	300 (11.81)	325 (12.80)	174 (6.85)	46.2 (101.85)	76.8 (169.31)
8	150	202.7 (7.98)	345 (13.58)	300 (11.81)	350 (13.78)	194 (7.64)	50.0 (110.23)	50.6 (111.55)
8	300	202.7 (7.98)	380 (14.96)	300 (11.81)	350 (13.78)	194 (7.64)	74.8 (164.91)	75.4 (166.23)
10	150	254.5 (10.02)	405 (15.94)	380 (14.96)	370 (14.57)	224 (8.82)	74.4 (164.02)	75.0 (165.35)
10	300	254.5 (10.02)	455 (17.91)	380 (14.96)	370 (14.57)	224 (8.82)	106.4 (234.57)	107.0 (235.89)
12	150	304.8 (12.00)	485 (19.09)	450 (17.72)	395 (15.55)	244 (9.61)	106.3 (234.35)	106.9 (235.67)
12	300	304.8 (12.00)	520 (20.47)	450 (17.72)	395 (15.55)	244 (9.61)	151.3 (333.56)	151.9 (334.88)

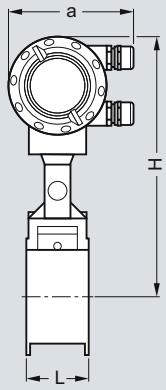


Sandwich version, front view, a = 133 mm (5.24 inch)

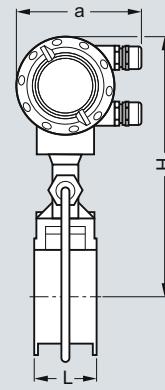

Sandwich version with pressure sensor, front view,
a = 133 mm (5.24 inch)

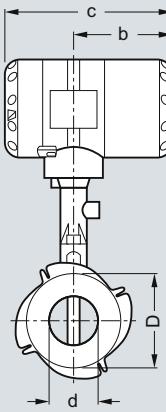

Sandwich version, side view, b = 105 mm (4.13 inch),
c = 179 mm (7.05 inch)

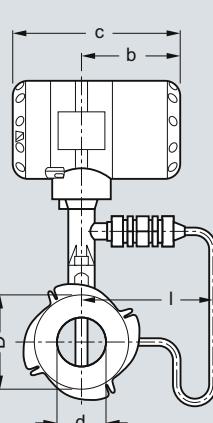

Sandwich version with pressure sensor, side view,
b = 105 mm (4.13 inch), c = 179 mm (7.05 inch)

Flow Measurement

SITRANS FX

SITRANS FX300

Sandwich version EN

Size DN	Pressure rating PN	Dimensions [mm (inch)]					Weight [kg (lb)]	
		d	D	L	H	I	Flowmeter (without pressure sensor)	Flowmeter (with pressure sensor)
15	16 ... 100	16 (0.63)	45 (1.77)	65 (2.56)	265 (10.43)	144 (5.67)	3.5 (7.72)	4.1 (9.04)
25	16 ... 100	24 (0.94)	65 (2.56)	65 (2.56)	265 (10.43)	144 (5.67)	4.3 (9.48)	4.9 (10.80)
40	16 ... 100	38 (1.50)	82 (3.23)	65 (2.56)	270 (10.63)	144 (5.67)	4.9 (10.80)	5.5 (12.13)
50	16 ... 100	50 (1.97)	102 (4.02)	65 (2.56)	275 (10.83)	144 (5.67)	6 (13.23)	6.6 (14.55)
80	16 ... 100	74 (2.91)	135 (5.31)	65 (2.56)	290 (11.42)	155 (6.10)	8.2 (18.08)	8.8 (19.40)
100	16 ... 100	97 (3.82)	158 (6.22)	65 (2.56)	310 (12.20)	164 (6.46)	9.5 (20.94)	10.1 (22.27)

3

Sandwich version ASME

Size DN	Pressure rating Class	Dimensions [inch]					Weight [lb]	
		d	D	L	H	I	Flowmeter (without pressure sensor)	Flowmeter (with pressure sensor)
½"	150, 300, 600	0.63	1.77	2.56	10.43	5.67	7.72	9.04
1"	150, 300, 600	0.94	2.56	2.56	10.43	5.67	9.48	10.80
1½"	150, 300, 600	1.50	3.23	2.56	10.63	5.67	10.80	12.13
2"	150, 300, 600	1.97	4.02	2.56	10.83	5.67	13.23	14.55
3"	150, 300, 600	2.91	5.31	2.56	11.42	6.10	18.08	19.40
4"	150, 300, 600	3.82	6.22	2.56	12.20	6.46	20.94	22.27

Flow tables

Measuring Range Limits

Water

Size		Q _{min}	Q _{max}	Q _{min}	Q _{max}
DN to EN 1092-1	DN to ASME B16.5	EN 1092-1 [m ³ /h]	EN 1092-1 [m ³ /h]	ASME B16.5 [m ³ /h]	ASME B16.5 [m ³ /h]
15	½"	0.45	5.07	0.44	4.94
25	1"	0.81	11.40	0.81	11.40
40	1½"	2.04	28.58	2.04	28.58
50	2"	3.53	49.48	3.53	49.48
80	3"	7.74	108.37	7.74	108.37
100	4"	13.30	186.22	13.30	186.21
150	6"	30.13	421.86	30.13	421.86
200	8"	56.60	792.42	56.60	792.42
250	10"	90.48	1 266.8	90.48	1 266.8
300	12"	131.41	1 839.8	131.41	1 839.8

Values based on water at 20 °C (68 °F)

Air

Size		Q _{min}	Q _{max}	Q _{min}	Q _{max}
DN to EN 1092-1	DN to ASME B16.5	EN 1092-1 [m ³ /h]	EN 1092-1 [m ³ /h]	ASME B16.5 [m ³ /h]	ASME B16.5 [m ³ /h]
15	½"	6.80	25.33	6.72	24.70
25	1"	10.20	81.43	10.20	81.43
40	1½"	25.35	326.63	25.35	326.63
50	2"	43.89	565.49	43.89	565.49
80	3"	96.14	1 238.64	96.14	1 238.60
100	4"	165.19	2 128.27	165.19	2 128.27
150	6"	374.23	4 821.60	374.23	4 821.60
200	8"	702.95	9 056.8	702.95	9 056.8
250	10"	1 123.7	14 478.0	1 123.7	14 478.0
300	12"	1 632.1	21 028.0	1 632.1	21 028.0

Values based on air at 20 °C (68 °F) and 1.013 bar_{abs} (14.7 psi_{abs})

Flow rate limits

Product	Nominal diameters to EN	to ASME	Minimum flow rates [m/s]	Maximum flow rates [m/s]
Liquids	DN 15 ... DN 300	DN ½" ... DN 12"	$0.5 \times (998/\rho)^{0.5}$ 1)	$7 \times (998/\rho)^{0.47}$ 1)
Gas, steam/vapor	DN 15 ... DN 300	DN ½" ... DN 12"	$6 \times (1.29/\rho)^{0.5}$ 2)	$7 \times (998/\rho)^{0.47}$ 3)

ρ = operating density [kg/m³]

1) Minimum flow rate 0.3 m/s (0.984 ft/s), maximum flow rate 7 m/s (23 ft/s)

2) Minimum flow rate 2 m/s (6.6 ft/s)

3) Maximum flow rate 80 m/s (262 ft/s); DN 15: 45 m/s (148 ft/s) and DN 25: 70 m/s (230 ft/s)

Flow Measurement

SITRANS FX

SITRANS FX300

Measuring range saturated steam: 1 to 7 bar

Overpressure [bar]	1	3.5	5.2	7
Density [kg/m³]	1.13498	2.4258	3.27653	4.16732
Temperature [°C]	120.6	148.2	160.4	170.6
Flow [kg/h]	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5			
15	½"	5.87	28.75	7.68 61.46 8.93 83.01 10.06 105.57
25	1"	11.82	92.42	17.28 197.53 20.09 266.81 22.66 339.35
40	1½"	29.64	370.71	43.33 792.33 50.63 1 070.2 56.8 1 361.2
50	2"	51.31	641.82	75.02 1 371.8 87.19 1 852.8 98.33 2 356.6
80	3"	112.41	1 405.8	164.33 3 004.7 191 4 058.4 215.39 5 161.8
100	4"	193.14	2 415.5	282.36 5 162.7 328.16 6 973.3 370.09 8 869.2
150	6"	437.56	5 472.4	639.69 11 696 743.45 15 798 838.44 20 093
200	8"	821.9	10 279.0	1 201.6 21 970.0 1 396.5 29 675.0 1 574.9 37 743
250	10"	1 313.9	16 433.0	1 920.9 35 122.0 2 232.5 47 439.0 2 517.7 60 337
300	12"	1 908.3	23 866.0	2 789.8 51 010.0 3 242.4 68 899.0 3 656.6 87 630

Measuring range saturated steam: 10.5 to 20 bar

Overpressure [bar]	10.5	14	17.5	20
Density [kg/m³]	5.88803	7.60297	9.31702	10.5442
Temperature [°C]	186.2	198.5	208.7	215
Flow [kg/h]	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5			
15	½"	12.78	149.17	16.51 192.61 20.23 236.04 22.89 267.12
25	1"	26.93	479.46	30.6 619.11 33.87 758.69 36.04 858.62
40	1½"	67.51	1 878.2	76.72 2 150.7 84.93 2 395.3 90.35 2 557.7
50	2"	116.89	3 251.7	132.82 3 723.4 147.03 4 147 156.42 4 428.1
80	3"	256.03	7 122.4	290.93 8 155.8 322.06 9 083.7 342.62 9 699.3
100	4"	439.91	12 238	499.9 14 013 553.38 15 608 588.69 16 666
150	6"	996.62	27 725	1 132.5 31 747 1 253.7 35 359 1 333.7 37 756
200	8"	1 872.1	52 079	2 127.3 59 634 2 354.9 66 419 2 505.2 70 921
250	10"	2 992.7	83 254	3 400.7 95 333 3 764.6 106 180 4 004.9 113 380
300	12"	4 346.5	120 920	4 939.1 138 460 5 467.5 154 210 5 816.5 164 660

Measuring range saturated steam: 15 to 100 psig

Overpressure [psig]	15	50	75	100
Density [lbs/ft³]	0.0719	0.1497	0.2036	0.2569
Temperature [°F]	249.98	297.86	320.36	338.184
Flow [lbs/h]	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5			
15	½"	12.95	64.35	16.83 133.87 19.62 182.02 22.04 229.63
25	1"	26.25	206.83	37.86 430.3 44.15 585.06 49.59 738.09
40	1½"	65.81	829.61	94.92 1 726 110.68 2 346.7 124.32 2 960.5
50	2"	113.94	1 436.3	164.34 2 988 191.63 4 062.9 215.23 5 125.6
80	3"	249.57	3 146.1	360 6 545.3 419.74 8 899.4 471.45 11 227
100	4"	428.81	5 405.7	618.51 11 246 721.21 15 291 810.06 19 291
150	6"	971.47	12 246	1 401.2 25 478 1 633.9 34 642 1 835.2 43 703
200	8"	1 824.8	23 004	2 632.1 47 859 3 069.1 65 072 3 447.2 82 092
250	10"	2 917.2	36 774	4 207.7 76 508 4 906.4 104 030 5 510.8 131 230
300	12"	4 236.8	53 410	6 111.1 111 120 7 125.8 151 080 8 003.6 190 600

3

Measuring range saturated steam: 150 to 300 psig

Overpressure [psig]	150	200	250	300
Density [lbs/ft³]	0.3627	0.4681	0.5735	0.6792
Temperature [°F]	366.08	388.04	406.22	422.06
Flow [lbs/h]	min.	max.	min.	max.
DN to EN 1092-1	DN to ASME B16.5			
15	½"	27.79	324.21	35.86 418.47 43.94 512.66 52.04 607.12
25	1"	58.93	1 042.1	66.94 1 345.1 74.1 1 647.8 80.63 1 951.5
40	1½"	147.72	4 107.2	167.83 4 702.8 185.76 5 237 202.15 5 728
50	2"	255.75	7 111.9	290.56 8 141.9 321.6 9 066.8 350 9 917
80	3"	560.19	15 578	636.44 17 834 704.43 19 860 766.6 21 722
100	4"	962.54	26 766	1 093.5 30 643 1 210.4 34 124 1 317.2 37 324
150	6"	2 180.6	60 639	2 477.4 69 421 2 742.1 77 307 2 984 84 556
200	8"	4 096.1	113 900	4 653.6 130 400 5 150.7 145 210 5 605.2 158 830
250	10"	6 548.1	182 090	7 439.3 208 460 8 234.1 232 140 8 960.6 253 910
300	12"	9 510.2	264 460	10 805 302 760 11 959 337 150 13 014 368 770

Notizen

3