

# DPS5000

## Digital Pressure Sensing Platform

The new DPS5000 from GE, part of the UNIK5000 family, offers integrated digital electronics to enhance the performance level of the UNIK 5000 Pressure Sensing Platform to levels unmatched by traditional analogue sensors. It features an I2C digital interface, over which fully compensated readings of Pressure and Temperature are sent, as well as control of many functions of the device.

### High Quality

With 40 years of pressure measurement experience, our field-proven Druck technology is at the heart of the new platform, resulting in a range of high quality, high stability pressure sensors.

### Bespoke as Standard

Custom-built from standard components, manufacturing sensors to your requirements is fast and simple; each UNIK 5000 is a “bespoke” pressure sensing solution, but with the short lead times and competitive pricing you would expect from standard products.

### Expertise

We have the people and the knowledge to support your needs for accurate and reliable product performance; our team of experts can help you make the right sensor selection, guiding you and providing the help and tools you need. It is important that you ensure that the sensor materials and performance selected are suitable for your application.



### Features

- Ranges from 70 mbar to 100 bar
- Total accuracy to  $\pm 0.1$  % FS
- Stainless steel construction
- 3 V supply voltage
- Low power
- I2C digital output
- Sleep mode
- Hazardous area certifications
- Excellent long-term stability



# DPS5000 Specifications

## Operating Pressure Ranges

### Gauge Ranges

#### Zero-based ranges:

- 70 mbar
- 200 mbar
- 350 mbar
- 700 mbar
- 1 bar
- 2 bar
- 3.5 bar
- 7 bar
- 10 bar
- 20 bar
- 28 bar
- 35 bar
- 70 bar
- 100 bar

### Absolute Ranges

- 0.8 to 3 bar
- 1 to 7 bar
- 2 to 12 bar
- 3 to 28 bar
- 5 to 40 bar
- 10 to 70 bar
- 18 to 90 bar
- 15 to 100 bar

### Over Pressure

2 × pressure range with negligible calibration change

### Containment Pressure

4 × pressure range for gauge ranges (200 bar maximum)  
200 bar for absolute ranges

### Supply

Supply voltage

2.7 to 3.6 Vdc

Current

<50 µA Standby

<2 mA average during acquisition

### Output/Communications

I2C Slave Device, 100 kHz maximum data rate

### Power-on Time

30 ms to acquisition from standby

### Insulation Resistance

500 Vdc;  $\geq$  100 M $\Omega$

## Performance

### Pressure Performance

Calibrated Accuracy over the calibrated temperature range including zero and span setting and the effects of non-linearity, hysteresis and repeatability

### Gauge Reference

$\pm 0.1$  % FS

Increases pro-rata for pressures below 700 mbar

### Absolute Reference

$\pm 0.2$  % of reading (RDG)

### Temperature Performance

Accuracy over the calibrated temperature range  
 $\pm 3^\circ\text{C}$

### Long Term Stability

$\pm 0.05$  % FS /year typical

$\pm 0.1$  % FS Maximum at reference conditions.

Increases pro-rata below 700 mbar

## Physical Specifications

### Environmental Protection

Internal version – Not applicable

External version – IP68 to 700 mH<sub>2</sub>O

### Operating Temperature Range

$-40^\circ\text{C}$  to  $+85^\circ\text{C}$  ( $-40^\circ\text{F}$  to  $+185^\circ\text{F}$ )

### Pressure Media

Fluids compatible with stainless steel 316L and Hastelloy C276

Statement in accordance with Pressure

Equipment Directive 92/23/EC

Fluid classification in accordance with Directive 67/548/EEC

### Enclosure Materials

Stainless steel (body)

### Pressure Connectors

PA G1/4 female

PB G1/4 male flat

PE 1/4 NPT female

PF 1/4 NPT male

Other connectors may be available, Contact GE to discuss your requirement

## Electrical Connector

Option Code	Description	IP rating
0 Internal	None (flying leads)	-
3 External	Polyurethane cable	IP68 to 700 mH <sub>2</sub> O

## Wiring Details

Option 0 Internal		Option 3 External	Function
Pin	Colour		
1	Red	Red	Supply +ve
2	Yellow	Orange	I2C SDA
3	Green	Black	I2C SCL
4	Blue	White	O V
5	Orange	Yellow	Do not Connect
6	Black	Blue	Do not Connect
-	-	Screen	Case

## General Certifications

RoHS 2002/95/EC

CRN Certified OF 13650.513467890YTN for Pressure ranges up to and including 100 bar

## CE Conformity

Pressure Equipment Directive 97/23/EC: Sound Engineering Practice

ATEX 94/9/EC (Optional)

## EMC Directive 2004/108/EC (External version only)

BS EN 61326-1:2013

BS EN 61000-6-1: 2007

BS EN 61000-6-3: 2007 + A1:2011

## Hazardous Area Approvals

### External Version (Apparatus)

ATEX  II 1G

IECEx Ex ia IIC T4 Ga (-40°C ≤ Ta ≤ 80°C)

### Internal Version (Component)


ATEX  II 1G

IECEx Ex ia IIC Ga

## Ordering Information

### 1) Select part number

#### Main Product Family

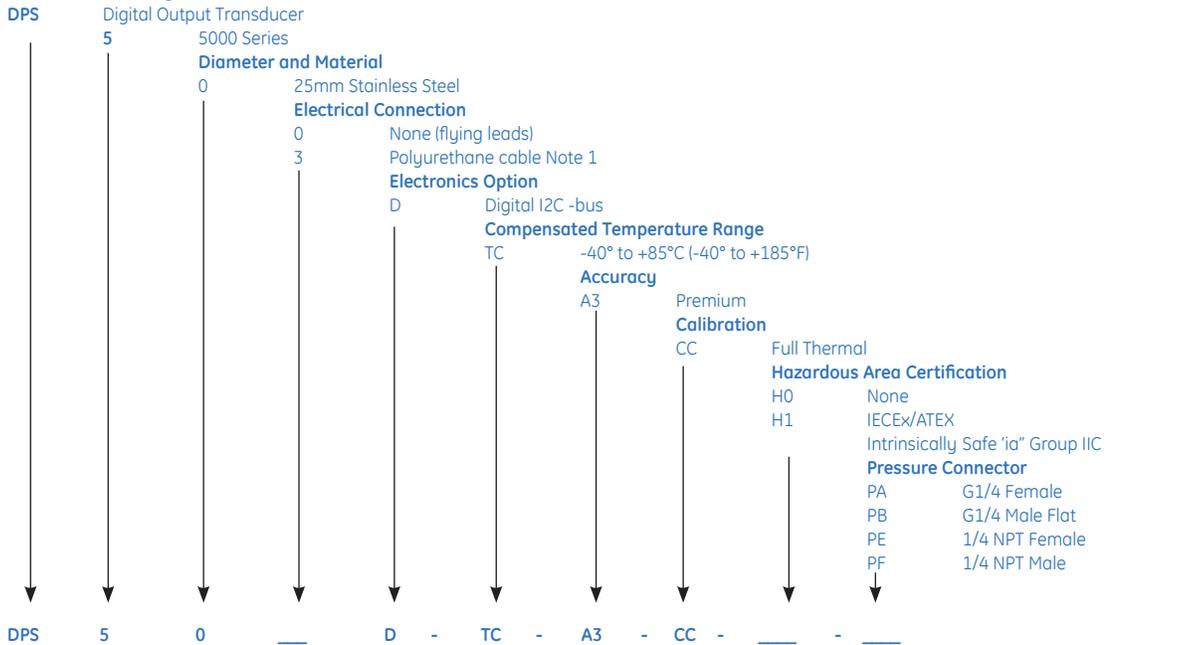

### Ordering Notes


Note 1- Cable length 3m

### Typical Order Example:

DPS503D-TC-A3-CC-H1-PF 20 barg


# Mechanical Drawings

## Internal Version

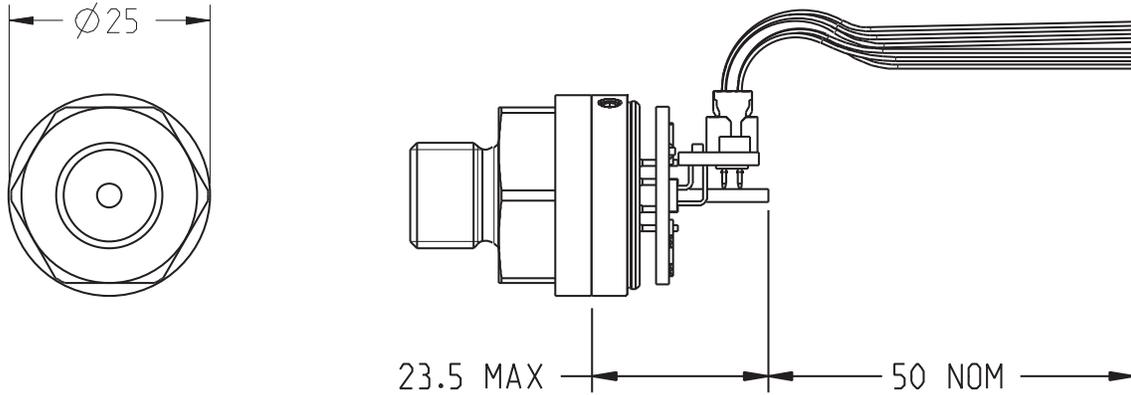

GAUGE SENSOR WITH PB PRESSURE CONNECTOR SHOWN

## External Version

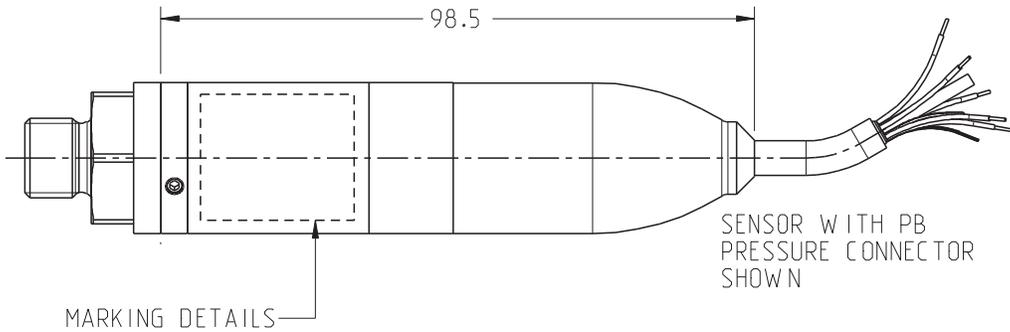

**Notes:**

(1) All dimensions in millimetres.



[www.gemeasurement.com](http://www.gemeasurement.com)

920-660A