

DN2 SERIES IECEx HYDRAULIC SOLENOID PILOT VALVE



- Specifically designed for Severe Offshore Environments
- Certified for Zone 1 Hazardous Areas
- IECEx BAS.070029x
- M.T.B.F., SFF, PFD and SIL Data (Available upon request)
- Easy Installation, Repair and Replacement
- Ambient Temperature Range -20°C to +80°C
- Low Power Consumption (3.5 & 8 Watts)
- 316 Stainless Steel Construction
- Wide range of operators available
- 690 bar Max Operating Pressure
- Leak tight
- 1 litre/min

CERTIFICATION OPTIONS AVAILABLE



General Description

The DN2 Cartridge Insert System replaces conventional ball-seated type internals, typically characterised by small individual components and require a certain level of expertise and a suitably clean environment in which to carry out their replacement. The new one-piece Poppet Cartridge Insert System simplifies replacement and considerably reduces repair costs.

The DN2 valve itself features an 'O' ring interface that enables it to be fitted with a 1/4" NPT ported subplate as standard, or manifold mounted for use in wellhead control applications. This interface also allows direct mounting of the DN2 valve to larger pilot-operated DN5 and DN10 valves, whereby increasing the flow capacity up to 40L/min. (Please consult factory for further information).

By removing just 4 bolts the valve can be dismantled without disturbing pipework and possibly contaminating the hydraulic system. Blanking or flushing plates can also be supplied.

DN2 SERIES IECEX HYDRAULIC SOLENOID PILOT VALVE

Ambient Temperature Range

- Standard: -20°C to +60°C (-4°F to +176°F)
- Low temperature option: -50°C (-58°F)

Ingress Protection

- IP67

Filtration

- Recommended 10 micron absolute

Construction Materials

- Valve bodies and subplates: 316L Stainless Steel
- Wetted parts: various grades of stainless steel/ceramic
- Fasteners: A4, grade 80 stainless steel
- Springs: stainless steel

Protection Class

- Exd IIC T6 at 60°C

Power Consumption

- 3.5 & 8 watts

Operating Pressure Range


- 0 to 690 bar depending on operator type

Operating Medium


- Fluids - Suitable for use with Mineral Oils, Water Glycols and Synthetic fluids

Weight (approximate)

- 4.0 kgs



DN2 SERIES IECEx
SCHEMATICS

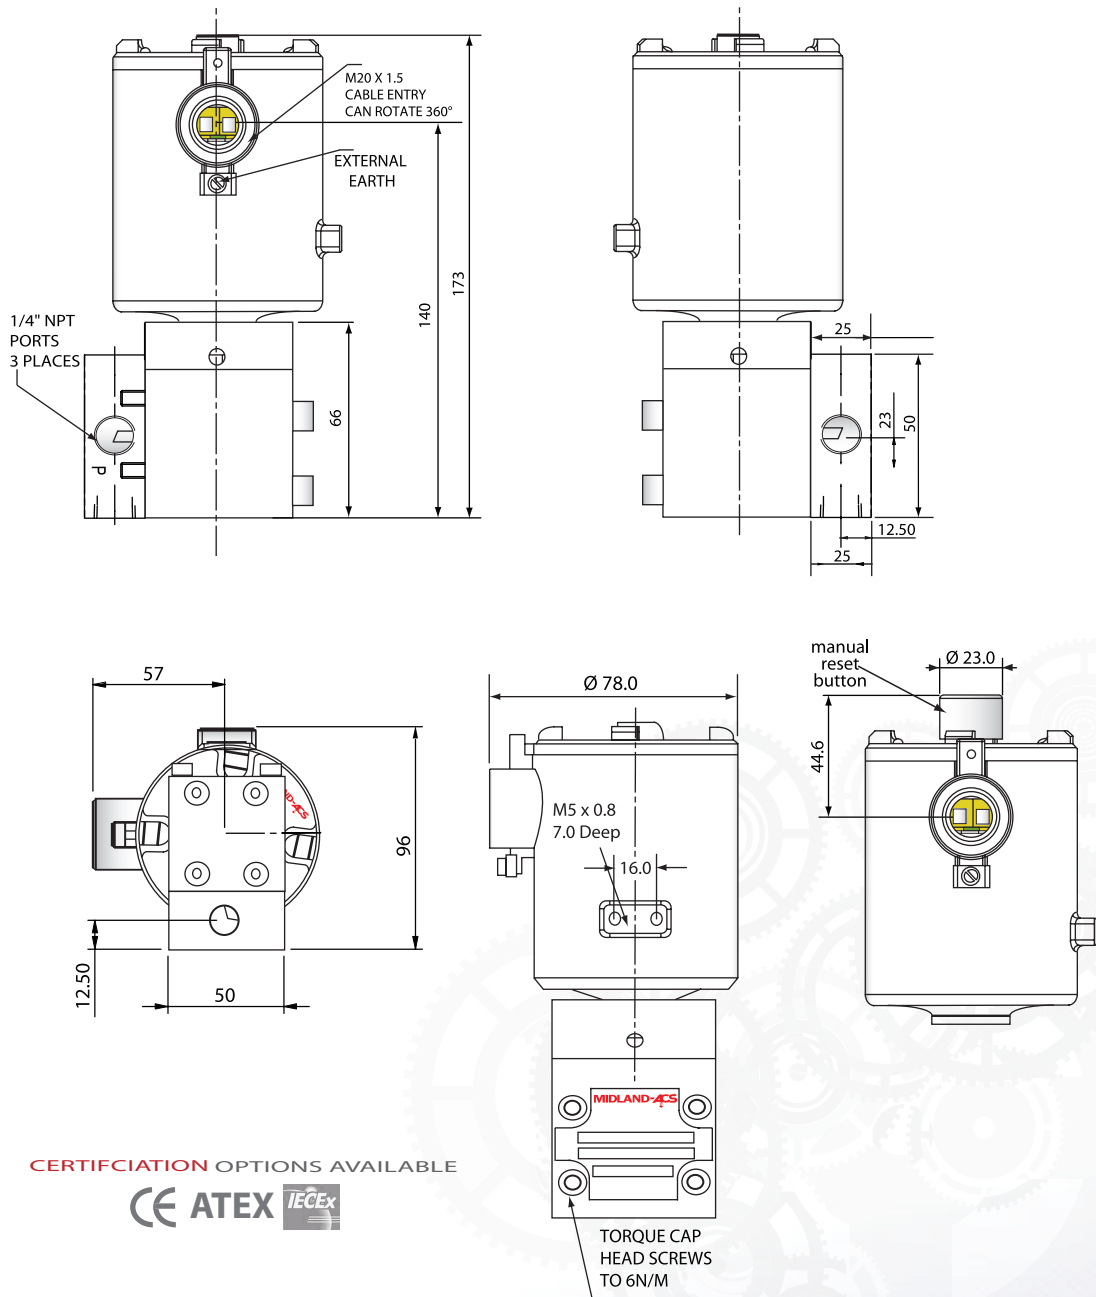

CERTIFICATION OPTIONS AVAILABLE
CE ATEX IECEx