

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Overview



Pointek CLS500 is an inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic, and aggressive chemicals in critical conditions of high temperature and pressure.

Benefits

- Patented Active-Shield technology so measurement is unaffected by material buildup in active shield section
- 2-wire loop powered with solid-state switch or 4 to 20/20 to 4 mA output
- Simple push-button calibration and integrated local display
- Full function diagnostics
- HART communications for remote commissioning and inspection

Application


Patented Active-Shield technology ensures that measurement is unaffected by vapors, product deposits, dust and condensation. The unique mechanical probe design coupled with a high performance transmitter gives superior performance in a wide range of level detection applications.

Pointek CLS500's microprocessor-based electronics provide one-point calibration, making setup possible without shutting down your production process.


- Key Applications: foam or liquid/foam level, glycol regenerators, high-pressure coalescers, LNG applications

Configuration


Installation

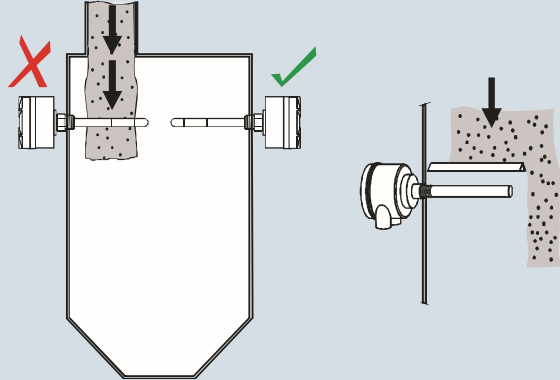

Keep unit out of path of falling material, or protect probe from falling material.

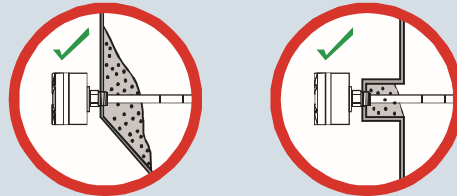

Build up of material in active shield area does not affect switch operation.

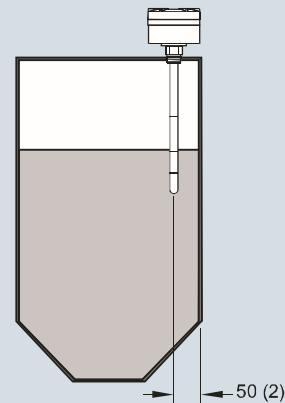

Install probe at least 50 (2) from tank wall.

Pointek CLS500 installation, dimensions in mm (inch)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Technical specifications

Input		Design	
Measuring range	0 ... 330 pF	Material	
Span	Min. 1 pF	<ul style="list-style-type: none"> Wetted parts material - Standard rod 	316L stainless steel PFA
Output		<ul style="list-style-type: none"> Probe isolation (rod) 	
<ul style="list-style-type: none"> Solid-state switch Output Protection 	Galvanically isolated Against reversed polarity (bipolar)	Probe diameter	
<ul style="list-style-type: none"> Max. switching voltage 	<ul style="list-style-type: none"> 30 V DC 30 V peak AC 	<ul style="list-style-type: none"> Standard rod version (PFA) High temperature rod version (stainless steel) 	16 mm (0.63 inch) 19 mm (0.75 inch)
<ul style="list-style-type: none"> Max. load current Voltage drop Time delay (pre or post switching) 	82 mA < 1 V, typical at 50 mA 1 ... 60 s	Probe length	
Current loop	4 ... 20 mA/20 ... 4 mA	<ul style="list-style-type: none"> Standard rod version (PFA) 	Max. 1 000 mm (39.4 inch) with 16 mm (0.63 inch) diameter probe Max. measuring length 1 000 mm (39.4 inch) with 19 mm (0.75 inch) diameter probe
Accuracy (transmitter)		<ul style="list-style-type: none"> High temperature rod version (stainless steel) 	
Temperature stability	0.15 pF (0 pF) or < 0.25 % (typical < 0.1 %) of actual measurement value, whichever is greater over the full temperature range	Process connection of probe	
Non-linearity and repeatability	0.1 % of full scale and actual measurement respectively	<ul style="list-style-type: none"> Threaded mounting 	NPT [(Taper), ANSI/ASME B1.20.1] R [(BSPT), EN 10226/PT (JIS-T), JIS B 0203] G [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202] ASME, EN 1092-1
Accuracy	Deviation < 0.1 % of measured value	<ul style="list-style-type: none"> Flange mounting 	
Rated operating conditions¹⁾		Enclosure	
Installation conditions		<ul style="list-style-type: none"> Material 	Aluminum, epoxy-coated (stainless steel option available). Contact ceg.smpi@siemens.com
- Location	Indoor/outdoor	<ul style="list-style-type: none"> Cable inlet Degree of protection 	2 x ½" NPT Type 4X/NEMA4X/IP65, IP68
Ambient conditions		Power supply	Max. 33 V DC
<ul style="list-style-type: none"> Ambient temperature (transmitter) Installation category Pollution degree 	-40 ... +85 °C (-40 ... +185 °F) ²⁾ I 4	Features	
Medium conditions		Measurement current signaling	NAMUR NE 43
<ul style="list-style-type: none"> Relative dielectric constant ϵ_r Process temperature 	Min. 1.5 Temperature ratings are pressure dependent. See Pressure/Temperature curves on page 4/74.	Safety	<ul style="list-style-type: none"> Inputs/outputs fully galvanically isolated Polarity-insensitive current loop Fully potted Integrated safety barrier
- Standard (PFA)	-50 ... +200 °C (-58 ... +392 °F)	<ul style="list-style-type: none"> Diagnostics with fault alarm when: 	Primary variable (PV) out of limits, system failure in measurement circuit, deviation between A/D and D/A converter, check sum, watch dog and self-checking facility
- High temperature stainless steel version with thermal isolator	-60 ... +400 °C (-76 ... +752 °F)	<ul style="list-style-type: none"> Function rotary switch SMART communication 	Positions 0 ... 9, A ... F Conforming to HART Communication Foundation (HCF)
- Cryogenic version	-200 ... +200 °C (-328 ... +392 °F) Contact ceg.smpi@siemens.com for details.	Certificates and approvals	
Process pressure	Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 4/74.	<ul style="list-style-type: none"> General Purpose Non incensive/Non sparking 	CE, CSA/FM, C-TICK CSA/FM Class I, Div. 2, Groups A, B, C, D T4 ATEX II 3G 2D EEx n A [ib] IIC T6 to T4 T100 °C
<ul style="list-style-type: none"> Standard (PFA) High temperature version (stainless steel) 	-1 ... +150 bar g (-14.6 ... +2 175 psi g) -1 ... +35 bar g (-14.6 ... +507.6 psi g)	<ul style="list-style-type: none"> Dust Ignition Proof Explosion Proof Marine 	CSA/FM Class II and III, Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] T6 to T1 T100 °C FM Class 1, Div. 1, Groups A, B, C, D T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C Lloyds Register of Shipping, Categories ENV1, ENV2, ENV3, ENV5, Bureau Veritas

¹⁾ When operation is in areas classified as hazardous, observe restrictions according to relevant certificate.
See also Pressure/Temperature curves on page 4/74.

²⁾ Thermal isolator is used if process connection temperature exceeds 85 °C (185 °F)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Pointek CLS500 probe version	Standard	HT Series
Process connection types	Standard (PFA) (7ML5601, 7ML5602, 7ML5603)	High Temperature (Enamel or stainless steel) (7ML5604)
Threaded	Available as standard	–
Flange	Available as standard	Available as standard
Process connection materials		
316L stainless steel	Available as standard	Available as standard
Probe insulation		
None	–	HT stainless: available as standard
PFA	Available as standard	–
Length parameters		
Max. rod length	1 000 mm (40 inch)	1 000 mm (40 inch)
Process conditions ¹⁾		
Max. process pressure	150 bar g (2 175 psi g)	Stainless steel: ²⁾ 35 bar g (507 psi g)
Max. process temperature	200 °C (392 °F)	400 °C (752 °F)

¹⁾ When operation is in areas classified as hazardous, observe restrictions according to relevant certificate. See also Pressure/Temperature curves on page 4/74. Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 4/74.

²⁾ Pressure rating of process seal is temperature dependent. See Pressure/Temperature curves on page 4/74.

– Not available as standard

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data	Article No.	Selection and Ordering data	Order code
Pointek CLS500, threaded Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	7ML5601- 	Further designs Please add "-Z" to Article No. and specify Order code(s). Total insertion length: enter the total insertion length in plain text description Y01 Active Shield length - minimum length is 50 mm Y02: to mm ¹⁾ Y02 Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text Y15 Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 C11 Inspection Certificate Type 3.1 per EN 10204 C12	
Electronic transmitter No transmitter supplied MSP 2002-1 (330 pF)	0 1	Operating Instructions Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and manual library.	See page 4/73
Process connection ¾" 1" 1¼" 1½" 2"	A B C D E	Pointek Specials	See page 4/82
Threaded connection and rating NPT [(Taper), ANSI/ASME B1.20.1] R [(BSPT), EN 10226/PT (JIS-T) JIS B 0203] G [(BSPP), EN ISO 228-1/PF (JIS-P), JIS B 0202]	A B D		
Probe insulation/material of process connection PFA insulation/316L stainless steel	1		
Approvals General Purpose: CE, CSA/FM, C-TICK CSA/FM Class I, Div. 2, Groups A, B, C, D T4; ATEX II 3GD 2D EEx nA [ib] IIC T6 to T4 T100 °C; CSA/FM Class II and III Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C FM Class I, Div. 1, Groups A, B, C, D T4	1 2 4 6		
Probe/electrode diameter 16 mm (0.63 inch) rigid rod, minimum insertion length 200 mm (7.9 inch), maximum insertion length 1 000 mm (39.4 inch) ¹⁾	1		
Thermal isolator/remote version Rigid thermal isolator [for process connection temperature over 85 °C (185 °F)] No thermal isolator	A B		


¹⁾ Add Order code Y01 and Y02 in plain text:
 "Insertion/active shield length to mm"

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

4


Selection and Ordering data	Article No.	Selection and Ordering data	Order code
Pointek CLS500, welded flange Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	7ML5602-  A 0	Further designs Please add "-Z" to Article No. and specify Order code(s).	
Electronic transmitter MSP 2002-1 (330 pF)	1	Total insertion length: enter the total insertion length in plain text description Active Shield length - minimum length is 50 mm. Y02: to mm ¹⁾	Y01 Y02
Process connection and pressure rating <u>Welded flange, 316L stainless steel, raised face</u> 2" ASME, 150 lb 2" ASME, 300 lb 3" ASME, 150 lb 3" ASME, 300 lb ¹⁾ 4" ASME, 150 lb ¹⁾ 4" ASME, 300 lb ¹⁾ 6" ASME, 150 lb ¹⁾ 6" ASME, 300 lb ¹⁾ <u>Welded flange, 316L stainless steel, Type A flat faced</u> DN 50 PN 16 DN 50 PN 40 DN 80 PN 16 DN 80 PN 40 DN 100 PN 16 ¹⁾ DN 125 PN 16 ¹⁾ (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	AA AB BA BB CA CB DA DB EC ED FC FD GC HC	Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 Inspection Certificate Type 3.1 per EN 10204	Y15 C11 C12
Probe insulation/material of process connection PFA insulation/316L stainless steel	1	Operating Instructions Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and manual library.	See page 4/73
Approvals General Purpose CSA/FM Class I, Div. 2, Groups A, B, C, D T4; ATEX II 3GD 2D EEx nA [ib] IIC T6 to T4 T100 °C; CSA/FM Class II and III Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C FM Class I, Div. 1, Groups A, B, C, D T4	1 2 4 6	Pointek Specials	See page 4/82
Probe/electrode diameter 16 mm (0.63 inch) rigid rod, min. length 200 mm (7.9 inch), max. length 1 000 mm (39.4 inch)	1		
Thermal isolator Rigid thermal isolator [for process temperature over 85 °C (185 °F)] No thermal isolator	A B		

¹⁾ Custom shipping methods required. Contact factory for more details.

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data	Article No.
Pointek CLS500, single piece flange Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	7ML5603-  A 0
Electronic transmitter MSP 2002-1 (330 pF)	1
Process connection and pressure rating Single piece flange, 316L stainless steel, raised face 2" ASME, 150 lb 2" ASME, 300 lb 3" ASME, 150 lb 3" ASME, 300 lb ¹⁾ 4" ASME, 150 lb ¹⁾ 4" ASME, 300 lb ¹⁾ 6" ASME, 150 lb ¹⁾ 6" ASME, 300 lb ¹⁾ Single piece flange, 316L stainless steel, Type B1 raised faced DN 50 PN 16 DN 50 PN 25 DN 80 PN 16 DN 80 PN 25 DN 100 PN 16 ¹⁾ DN 100 PN 25 ¹⁾ DN 125 PN 16 ¹⁾ DN 125 PN 25 ¹⁾	AA AB BA BB CA CB DA DB EC ED FC FD GC GD HC HD
Probe insulation/material of process connection PFA insulation/316L stainless steel	1
Approvals General Purpose: CE, CSA/FM, C-TICK CSA/FM Class I, Div. 2, Groups A, B, C, D T4; ATEX II 3GD 2D EEx nA [ib] IIC T6 to T4 T100 °C; CSA/FM Class II and III Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C FM Class I, Div. 1, Groups A, B, C, D T4	1 2 4 6
Probe/electrode diameter 16 mm (0.63 inch) rigid rod, maximum length 1 000 mm (39.4 inch) (Y01)	1
Thermal isolator Rigid thermal isolator [for process connection temperature over 85 °C (185 °F)] No thermal isolator	A B

¹⁾ Custom shipping methods required. Contact factory for more details

Selection and Ordering data	Order code
Further designs Please add "-Z" to Article No. and specify Order code(s). Total insertion length: enter the total insertion length in plain text description Active Shield length - minimum length is 50 mm. Y02: to mm ¹⁾ Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000 Inspection Certificate Type 3.1 per EN 10204	Y01 Y02 Y15 C11 C12
Operating Instructions Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and manual library.	See page 4/73
Accessories	See page 4/82

¹⁾ See dimensional drawings on page 4/74 for further explanation of Y02

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data	Article No.	Selection and Ordering data	Article No.
Pointek CLS500 High temperature Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	7ML5604-	Pointek CLS500 High temperature Inverse frequency shift capacitance level switch for detecting interfaces, solids, liquids, toxic and aggressive chemicals in critical conditions of extreme temperature and pressure.	7ML5604-
Electronic transmitter MSP 2002-1 (330 pF)	1	Probe material of process connection No insulation/316L stainless steel ⁽³⁾⁽⁴⁾	1
Process connection and pressure rating <u>316L stainless steel, raised face⁽¹⁾</u> 2" ASME, 150 lb 2" ASME, 300 lb 2" ASME, 600 lb 2" ASME, 900 lb 3" ASME, 150 lb 3" ASME, 300 lb ⁽²⁾ 3" ASME, 600 lb ⁽²⁾ 3" ASME, 900 lb ⁽²⁾ 4" ASME, 150 lb ⁽²⁾ 4" ASME, 300 lb ⁽²⁾ 4" ASME, 600 lb ⁽²⁾ 4" ASME, 900 lb ⁽²⁾ 6" ASME, 150 lb ⁽²⁾ 6" ASME, 300 lb ⁽²⁾ 6" ASME, 600 lb ⁽²⁾ 6" ASME, 900 lb ⁽²⁾ <u>316L stainless steel, Type B1 flat faced</u> DN 50 PN 16 DN 50 PN 25 DN 50 PN 40 DN 50 PN 63 DN 80 PN 16 DN 80 PN 25 DN 80 PN 40 ⁽²⁾ DN 80 PN 63 ⁽²⁾ DN 100 PN 16 ⁽²⁾ DN 100 PN 25 ⁽²⁾ DN 100 PN 40 ⁽²⁾ DN 100 PN 64 ⁽²⁾ DN 125 PN 16 ⁽²⁾ DN 125 PN 25 ⁽²⁾ DN 125 PN 40 ⁽²⁾ DN 125 PN 64 ⁽²⁾ (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5 or EN 1092-1 standard.)	A 1 A 2 A 3 A 4 B 1 B 2 B 3 B 4 C 1 C 2 C 3 C 4 D 1 D 2 D 3 D 4 E 1 E 2 E 3 E 4 F 1 F 2 F 3 F 4 G 1 G 2 G 3 G 4 H 1 H 2 H 3 H 4	Stilling well No stilling well	0
		Approvals General Purpose CSA/FM Class I, Div. 2, Groups A, B, C, D T4; ATEX II 3GD 2D EEx nA [ib] IIC T6 to T4 T100 °C; CSA/FM Class II and III Div. 1, Groups E, F, G T4 ATEX II 1/2 GD EEx d [ia] IIC T6 to T1 T100 °C FM Class I, Div. 1, Groups A, B, C, D T4	A B D F
		Probe/electrode diameter Maximum length 1 000 mm (39.37 inch) ⁽⁴⁾	A
		Thermal isolator Rigid thermal isolator [for process connection temperature over 85 °C (185 °F)]	1
		¹⁾ Welded flange for no insulation option only ²⁾ Custom shipping methods required ³⁾ Non-conductive material only, stainless steel non-insulated probe diameter 19 mm (0.75 inch) ⁴⁾ Add Order code Y01 and Y02 in plain text: "Insertion/active shield length to mm" Minimum insertion length depends on probe version selected. See dimensional drawings on page 4/74 for more details.	

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Selection and Ordering data	Order code
Further designs	
Please add "-Z" to Article No. and specify Order code(s).	
Total insertion length: enter the total insertion length in plain text description	Y01
Active Shield length - minimum length is 50 mm. Y02: to mm ¹⁾	Y02
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text	Y15
Manufacturer's test certificate: M to DIN 55350, Part 18 and to ISO 9000	C11
Inspection Certificate Type 3.1 per EN 10204	C12
Operating Instructions	
Article No.	
English	7ML1998-5GG03
German	7ML1998-5GG32
French	7ML1998-5GG11
Dutch	7ML1998-5GG41
Note: The Operating Instructions should be ordered as a separate line on the order. This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	
Quick Start manual, multi-language	A5E32243995
This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.	
Accessories	
<u>General Purpose</u>	
1/2" NPT General Purpose Cable Entry IP68/IP69K NEMA6, -40 ... -100 °C (-40 ... -212 °F), cable size 6 ... 12 mm (0.236 ... 0.472 inch)	7ML1830-1JA
M20x1.5 General Purpose Cable Entry IP68/IP69K NEMA6, -40 ... -100 °C (-40 ... -212 °F), cable size 7 ... 12 mm (0.275 ... 0.472 inch)	7ML1830-1JC
Transmitter, MSP 2002-1, 330 PF	7ML1830-1JP
<u>Hazardous Locations</u>	
1/2" NPT EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1, Zone 2, Zone 21, Zone 22, and in Gas Groups IIA, IIB and IIC) -60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)	7ML1830-1JB
M20 EMC rated Cable Gland: Dust Ignition Proof, Flameproof Exd, and Increased Safety ATEX II 2 GD ExtD A21 (Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC) -60 ... +80 °C IP66, IP67, IP68, NEMA4X, cable sizes 5.5 ... 12 mm (0.216 ... 0.472 inch)	7ML1830-1JD
Pointek Specials	See page 4/82

¹⁾ See dimensional drawings on page 4/74 for further explanation of Y02


Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Characteristic curves

Pressure/temperature curve
CLS500 rod probes
Threaded process connections
(7ML5601)

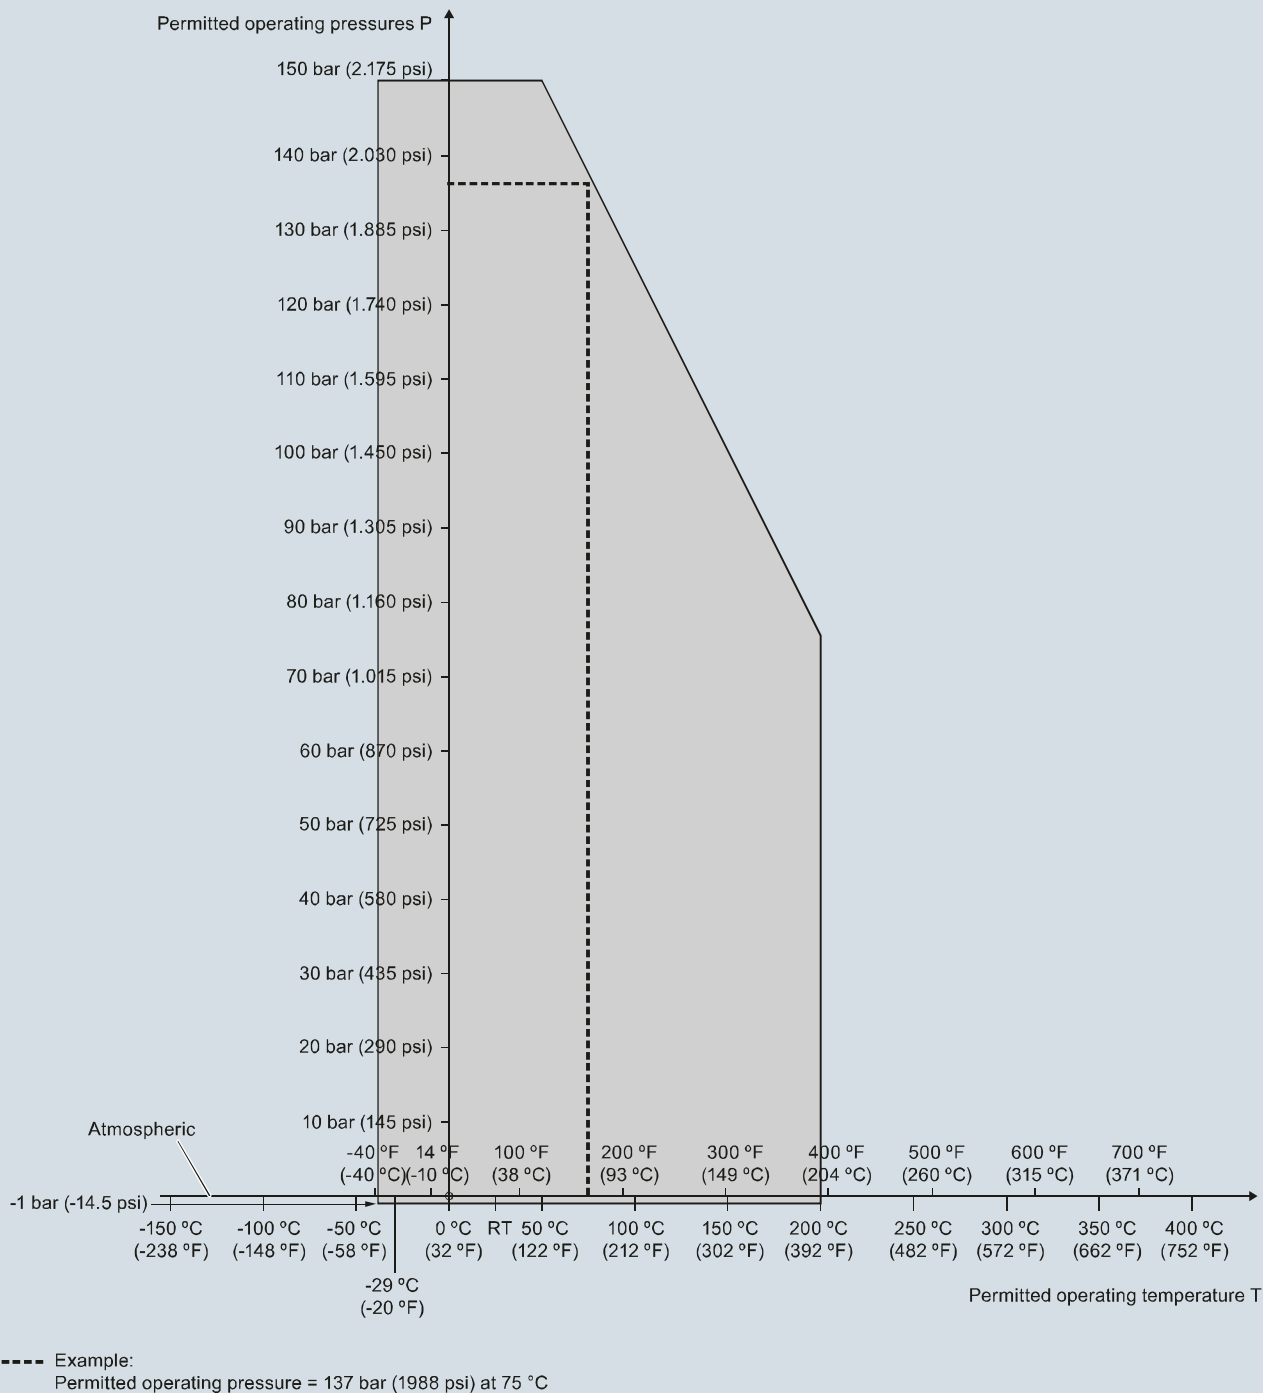

Pointek CLS500 Process Pressure/Temperature derating curves (7ML5601)

4


Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

4

Pressure/temperature curve
 CLS500 rod probes
 ASME flanged process connections
 (7ML5602 and 7ML5603)

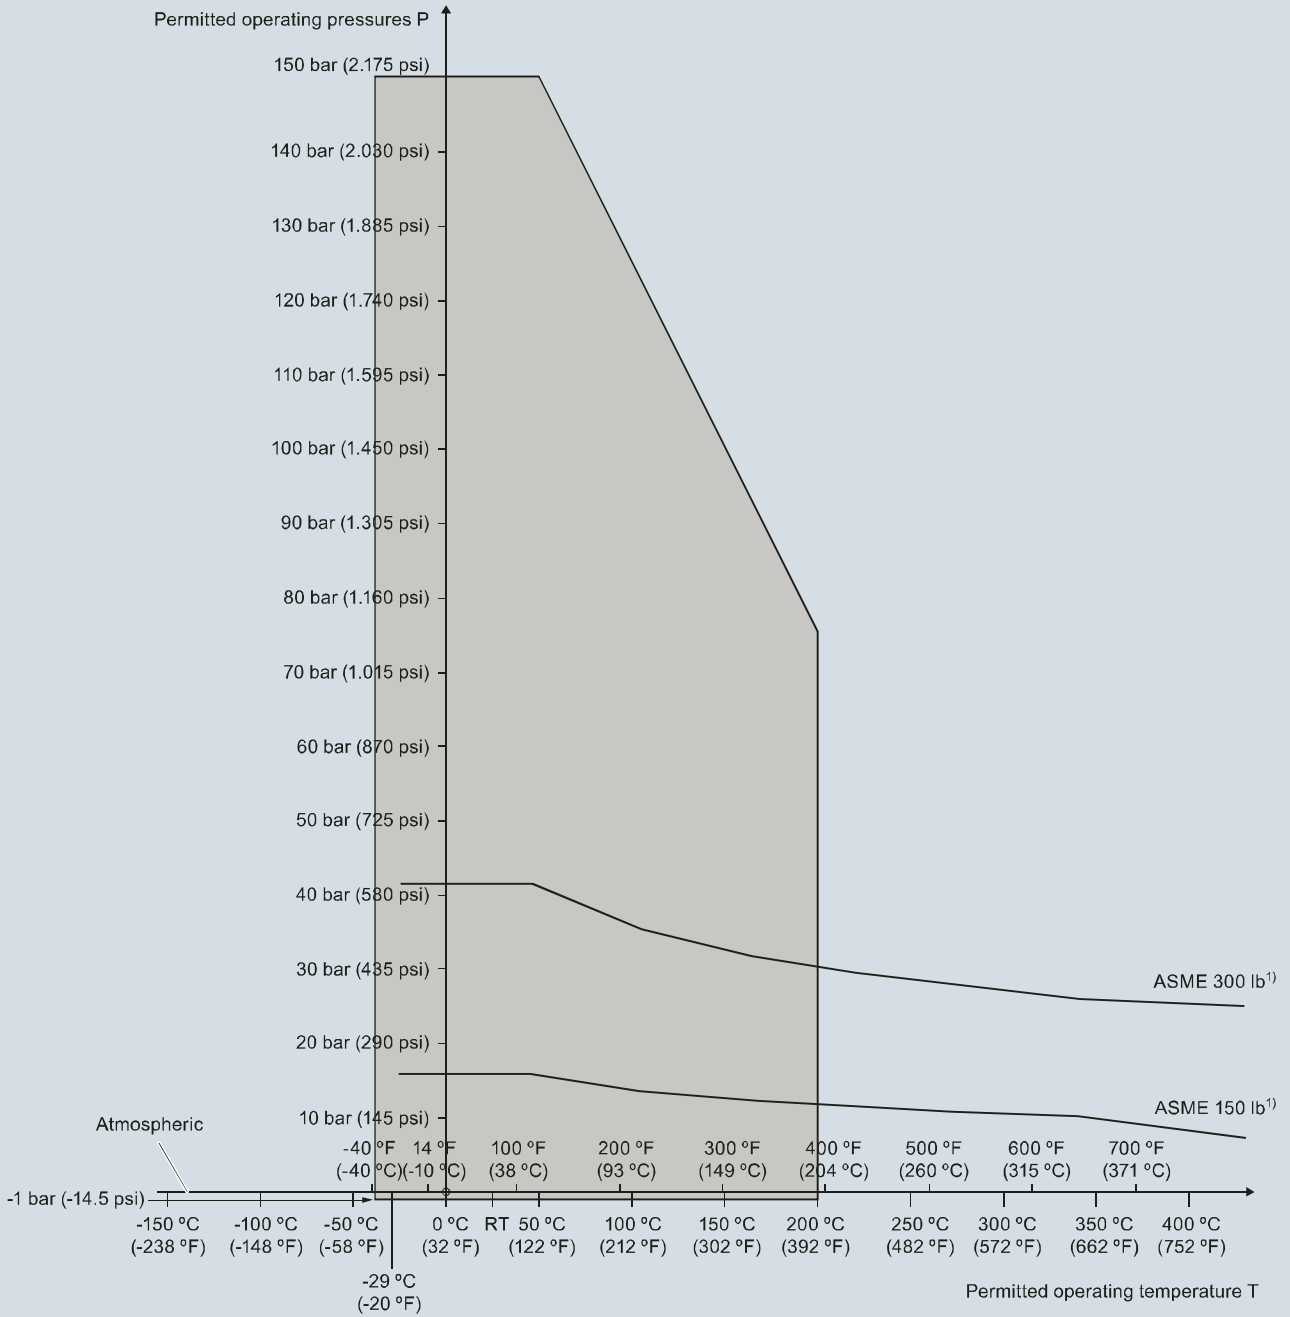

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS500 Process Pressure/Temperature derating curves (7ML5602 and 7ML5603)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Pressure/temperature curve
 CLS500 rod probes
 EN flanged process connections
 (7ML5602 and 7ML5603)

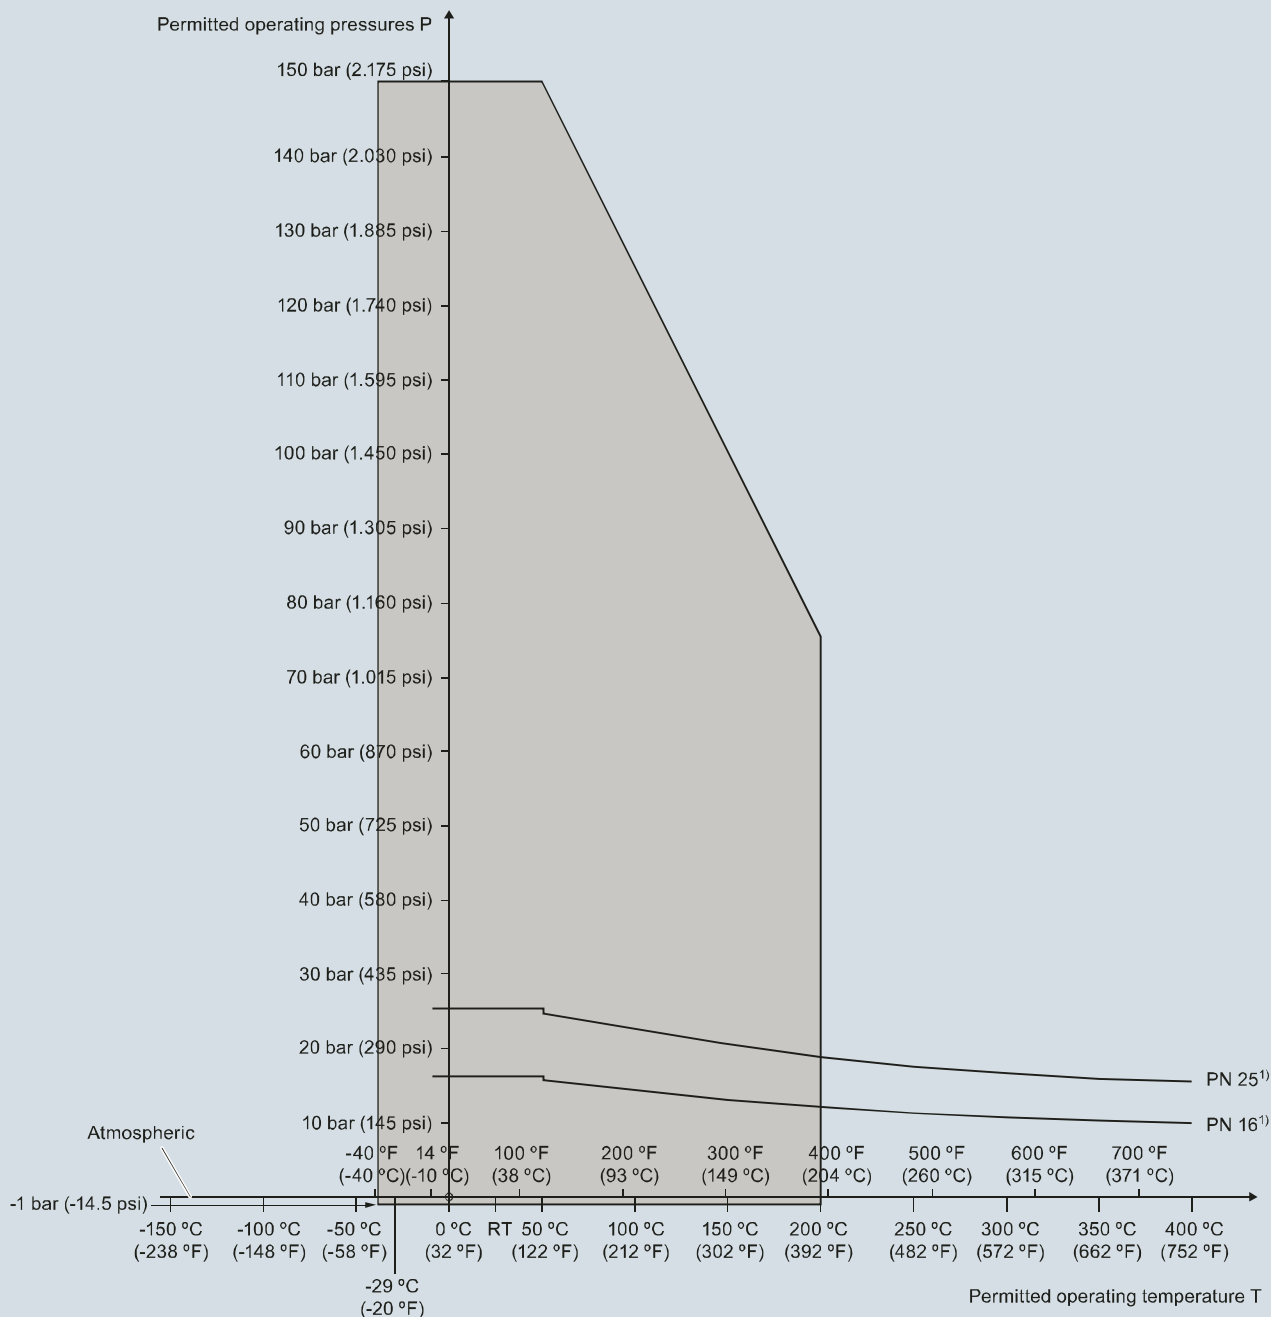

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS500 Process Pressure/Temperature derating curves (7ML5602 and 7ML5603)

4


Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

4

Pressure/temperature curve
CLS500 high temperature (no insulation)
ASME flanged process connections
(7ML5604)

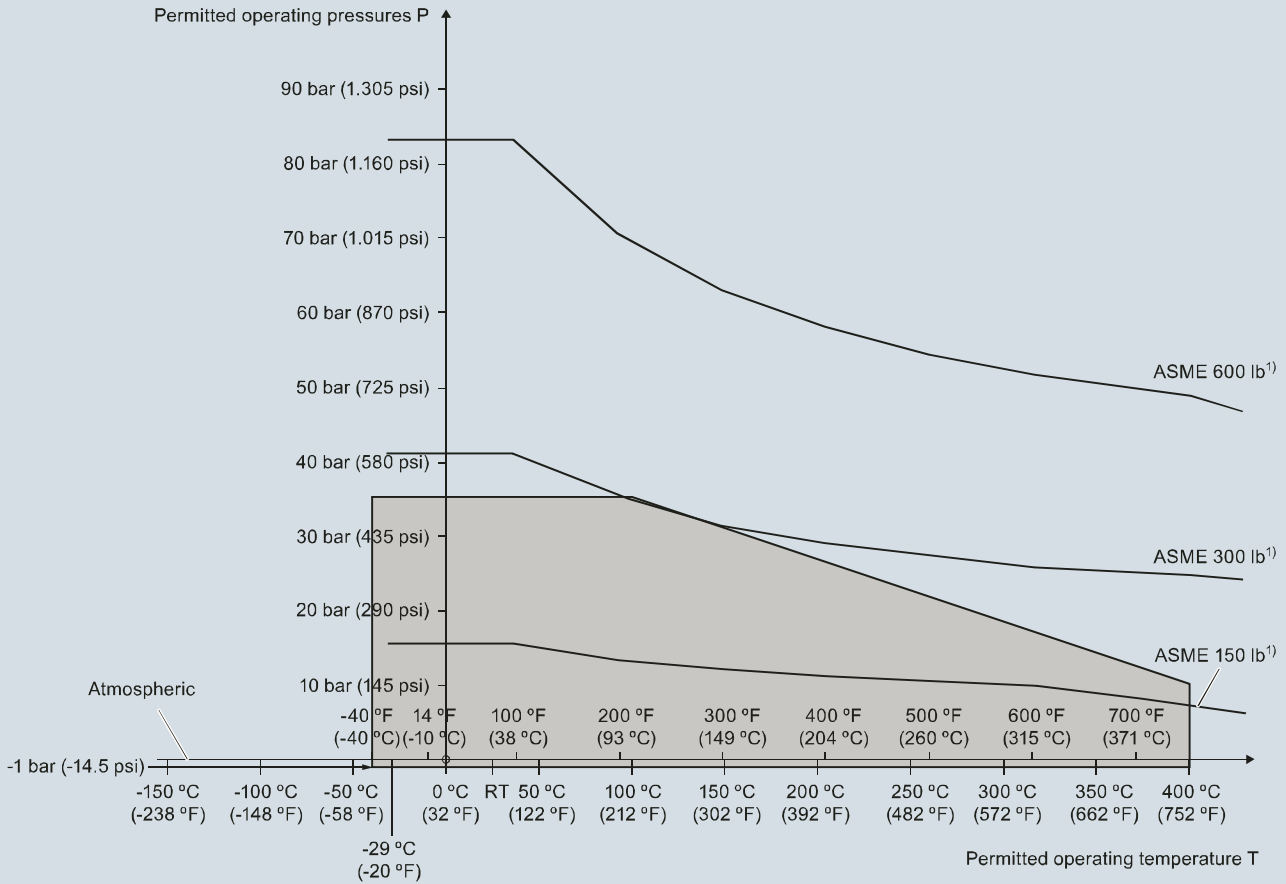

¹⁾ The curve denotes the minimum allowable flange class for the shaded area below.


Pointek CLS500 Process Pressure/Temperature derating curves (7ML5604)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Pressure/temperature curve
 CLS500 high temperature (no insulation)
 EN flanged process connections
 (7ML5604)

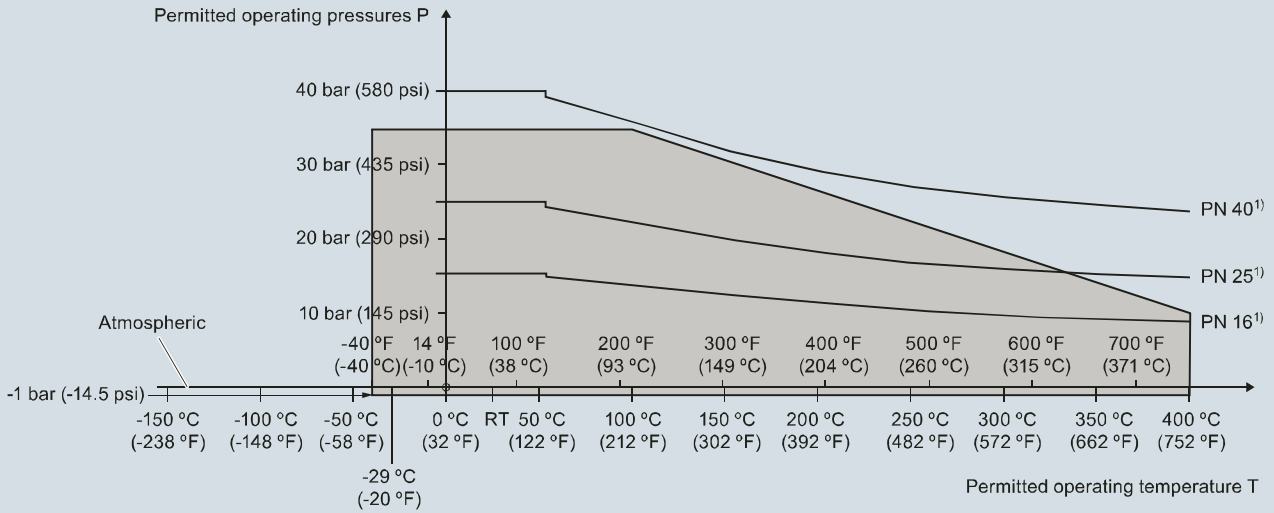

1) The curve denotes the minimum allowable flange class for the shaded area below.

Pointek CLS500 Process Pressure/Temperature derating curves (7ML5604)

4


Level Measurement

Point level measurement – Capacitance switches



Pointek CLS500

Dimensional drawings


Standard rod version Threaded (7ML5601)

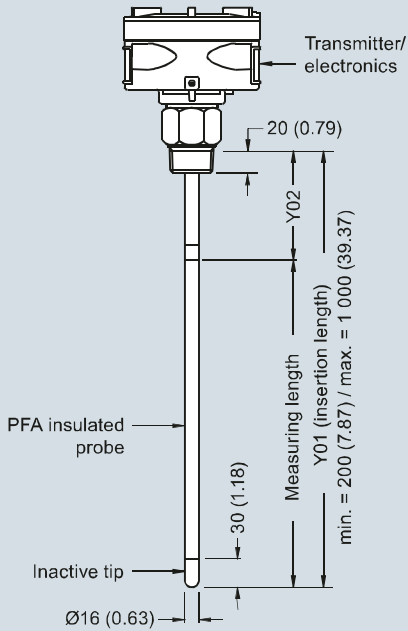


Standard configuration (7ML5601)



With explosion-proof seal option (all versions)

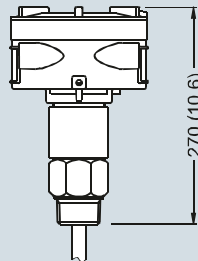

With thermal isolator option (all versions)

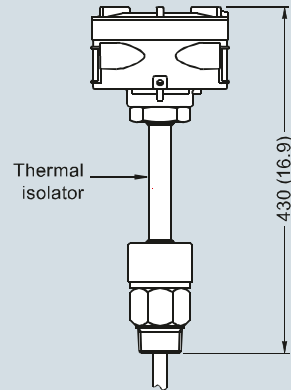

Pointek CLS500 - Threaded Process Connections, dimensions in mm (inch)


Level Measurement

Point level measurement – Capacitance switches


Pointek CLS500

4


Standard Rod version
Welded Flange (7ML5602)
Single Piece Flange (7ML5603)

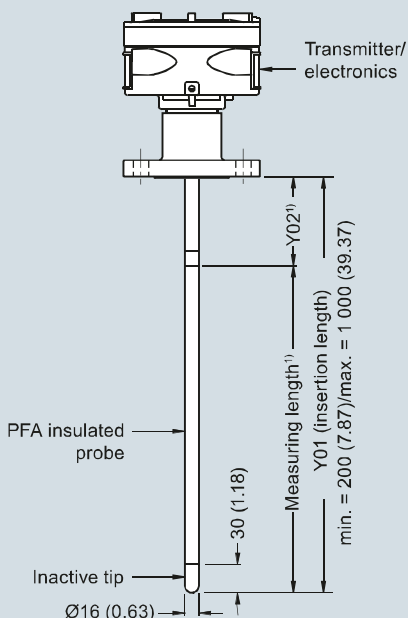


Standard configuration
(7ML5602, 7ML5603)

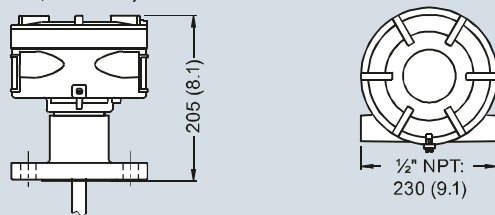


With explosion-proof seal option
(all versions)

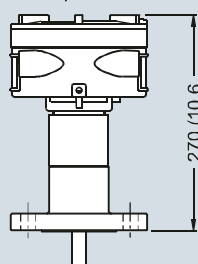

With thermal isolator option
(all versions)

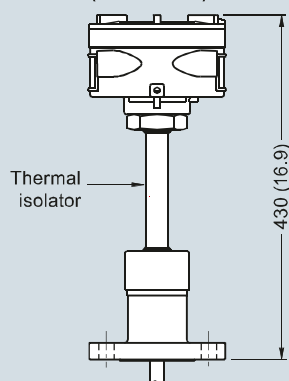

High temperature rod version
Welded Flange (7ML5604), Stainless steel rod⁴⁾

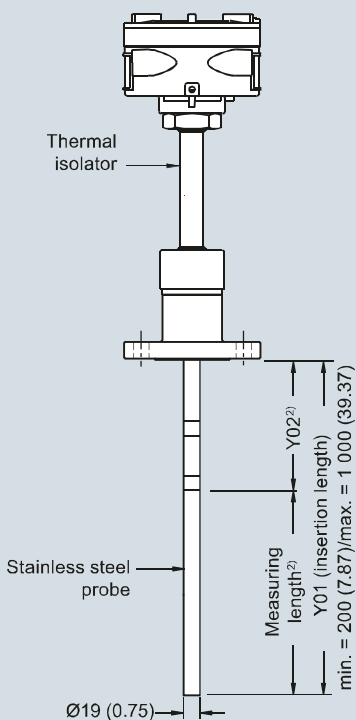

Flange Facing (raised face)	
Flange Class	Facing thickness
△ ASME 150/300	2 (0.08)
△ ASME 600/900	7 (0.28)
△ PN16/25/40/64	2 (0.08)

Notes:

- ¹⁾ Min. Y02 (active shield length) = 50 (1.96)
- ²⁾ Min. Y02 (active shield length) = 105 (4.13)
- ³⁾ Min. Y02 (active shield length) = 100 (3.94)
- ⁴⁾ Non conductive materials only

Insertion length does not include any raised face/gasket face dimension (see Flange Facing Table above)


Pointek CLS500 - Flanged Process Connections, dimensions in mm (Inch)

Level Measurement

Point level measurement – Capacitance switches

Pointek CLS500

Schematics

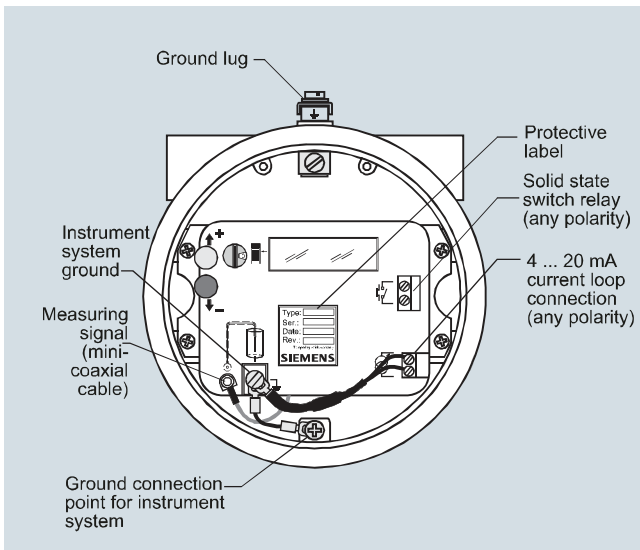

Pointek CLS500 connections