

Level Measurement

Point level measurement – Ultrasonic switch

Pointek ULS200

Overview



The Pointek ULS200 is an ultrasonic non-contacting switch with two switch points for level detection of bulk solids, liquids and slurries in a wide variety of industries; ideal for sticky materials.

Benefits

- 2 switch outputs for high-high, high, low and low-low level alarms or pump up/pump down control
- Integral temperature compensation
- AC or DC power supply
- Electronics provided with fail-safe function
- Threaded and sanitary fitting clamp process connections
- Polycarbonate or aluminum enclosures, Type 6/NEMA 6/IP67
- Easy, two-button programming

Application

The measuring range for bulk solids is max. 3 m (9.8 ft) and 5 m (16.4 ft) for liquids and slurries. Unlike invasive contacting devices, there is no material buildup on the sensor.

The level switch has a rugged design, combining the transducer and electronics in one durable device. It has no moving parts and is virtually maintenance-free.

The transducer, available in ETFE or PVDF copolymer, is inert to most chemicals. This means the device can be used in the chemical, petrochemical, water, and wastewater industries. A sanitary version of the ULS200, with an industry standard flange option, is easy to remove from the application for cleaning. It thus satisfies the prerequisites for use in the food, beverage, and pharmaceutical industries. The Pointek ULS200 delivers superior performance while reducing maintenance, downtime, and equipment replacement costs.

- Key Applications: liquids, slurries, fluid materials, plugged chute detection, chemical industry

Design

Installation

The Pointek ULS200 should be mounted in an area that is within the temperature range specified and that is suitable to the enclosure rating and materials of construction. The cover should be accessible to allow programming, wiring and display viewing.

It is advisable to keep the Pointek ULS200 away from high voltage or current runs, contactors and SCR control drives.

Locate the Pointek ULS200 so that it has a clear sound path perpendicular to the material surface. The sound path should not intersect the fill path, rough walls, seams, rungs etc.

Mounting and Interconnection

The Pointek ULS200 is available in three thread types: 2" NPT, R 2" (BSPT), EN 10226 or PF2 and can be fitted with the optional 75 mm (3 inch) flange adapter for mating to 3" ASME, DN 65, PN 10, and JIS 10K 3B sized flanges.

Separate cables and conduit may be required to conform to standard instrumentation wiring or electrical codes.


Level Measurement

Point level measurement – Ultrasonic switch


Pointek ULS200

Configuration

Parabolic mounting

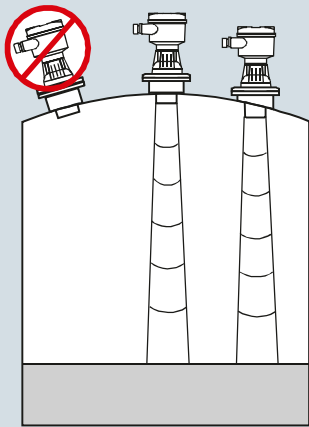

Flat mounting and Beam angle

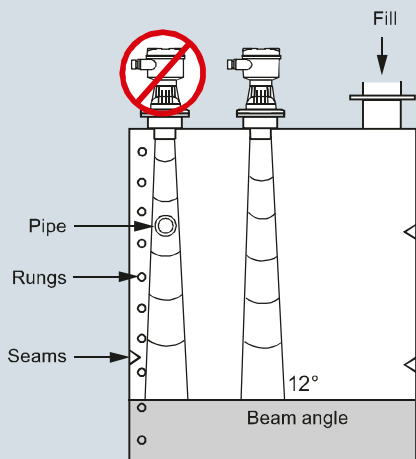

Pointek ULS200 Mounting

4

Level Measurement

Point level measurement – Ultrasonic switch


Pointek ULS200

Technical specifications

Mode of operation	
Measuring principle	Ultrasonic level switch
Measuring range	
Measuring range in liquids	0.25 ... 5 m (0.8 ... 16.4 ft)
Measuring range in bulk solids	0.25 ... 3 m (0.8 ... 9.8 ft)
Output	
AC Version (relay)	2 SPDT Form C contacts, rated 5 A at 250 V AC or 30 V DC, resistive load; rated 1 A at 48 V DC resistive load
DC Version (relay)	2 SPDT Form C contacts, rated 5 A at 30 V DC, resistive load; rated 1 A at 48 V DC resistive load
DC Version (transistor)	2 switches, rated max. 100 mA, 48 V DC
Accuracy	
AC/DC version	
• Resolution	3 mm (0.1 inch)
• Repeatability	0.25 % of measuring range
Rated operation conditions	
Installation conditions	
• Location	Indoors/outdoors
• Beam angle	12°
Ambient conditions	
• Ambient temperature	-40 ... +60 °C (-40 ... +140 °F)
• If mounted in metal threads	-20 ... +60 °C (-5 ... +140 °F)
Medium conditions	
• Process pressure	0.5 bar (7.25 psi) max.
Design	
Material	Polycarbonate or epoxy-coated aluminum with gasket
Weight	Approx. 1.5 kg (3.3 lb)
Transducer material	PVDF or ETFE copolymer
Threaded mounting	2" NPT [(Taper), ANSI/ASME B1.20.1] R 2" [(BSPT), EN 10226] or G 2" [(BSPP), EN ISO 228-1]
• Optional flange adapter	For 3" ASME, DN 65, PN 10 and JIS 10 K3B
Sanitary mounting	4" sanitary fitting clamp
Power supply	
AC version	100 ... 230 V AC, ± 15 %, 50/60 Hz, max. 12 VA, 5 W
DC version	18 ... 30 V DC, 3 W
Displays and controls	
Display	LCD, three digits, 9 mm (0.35 inch) high, for display of distance between sensor face and material, multi segment graphic for operating state
Memory	EEPROM, non-volatile
Programming	2 keys

Electronics/enclosure	Connection: terminal block, max. 2.5 mm ² (14 AWG) solid/ 1.5 mm ² (16 AWG) stranded
Degree of protection	IP67/Type 6/NEMA 6
Cable inlet	2 x 1/2" NPT or 2 x PG 13.5
Certificates and approvals	<ul style="list-style-type: none"> • CE (EMC certificate available on request), CSA_{US/CA}, FM • CSA/FM Class I, II, III, Div. 1, Gr A, B, C, D, E, F, G T4 • ATEX II 2G Ex d mb IIC T5 Gb • C-TICK, ANZEx Ex ds IIC T5, DIP A21 T5, IP65/IP67 • INMETRO Ex d mb IIC T5 Gb

Options

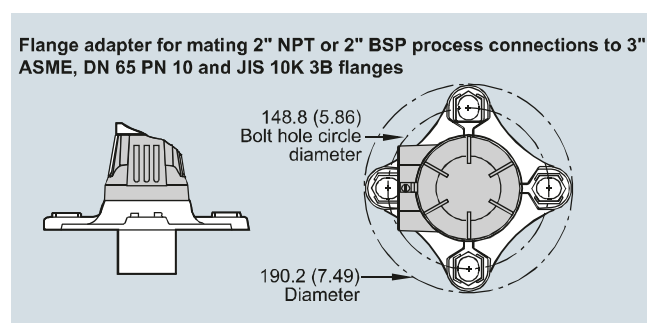

Pointek ULS200 Optional Flange Adapter, dimensions in mm (inch)

Level Measurement

Point level measurement – Ultrasonic switch

Pointek ULS200

Selection and Ordering data

Pointek ULS200

Ultrasonic non-contacting switch with two switch points for level detection of bulk solids, liquids and slurries in a wide variety of industries; ideal for sticky materials

Power supply

- 24 V DC, relay output
- 24 V DC, transistor output
- 100 ... 230 V AC, relay output

Approvals

CE, C-TICK, CSA Class I Div. 1, Class II Div. 1, Class III¹⁾

CE, C-TICK, FM Class I Div. 1, Class II Div. 1, Class III¹⁾⁵⁾

CE, C-TICK, CSA Class I, II, Div. 2²⁾

CE, C-TICK, CSA_{us/c}, FM

CE, C-TICK, ATEX II 2G EEx dmb IIC T5 Gb³⁾⁶⁾

INMETRO Ex d mb IIC T5 Gb³⁾⁶⁾

C-TICK, ANZE_{Ex} Ex ds IIC T5, DIP A21 T5, IP65/IP67 Class I, Zone 1³⁾⁶⁾

Transducer/Process connection

ETFE, 2" NPT [(Taper), ANSI/ASME B1.20.1]

ETFE, R 2" [(BSPT), EN 10226]

ETFE, G 2" [(BSPP), EN ISO 228-1]

PVDF copolymer, 2" NPT [(Taper), ANSI/ASME B1.20.1]

PVDF copolymer, R 2" [(BSPT), EN 10226]

PVDF copolymer, G [(BSPP), EN ISO 228-1]

PVDF copolymer, 4" sanitary mounting⁴⁾

Enclosure/cable inlet

Polycarbonate

- Cable inlet PG 13.5
- Cable inlet ½" NPT

Aluminum

- Cable inlet PG 13.5
- Cable inlet ½" NPT

Article No.

7ML1510-

0

1

2

3

F

G

J

K

L

M

N

A

B

C

E

F

G

J

1

2

3

4

Selection and Ordering data

Further designs

Please add **"-Z"** to Article No. and specify Order code(s)

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]; Measuring-point number/identification (max. 27 characters) specify in plain text

Operating Instructions

Quick Start manual, multi-language

This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library.

Accessories

Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosures

Universal Box Bracket Mounting Kit

3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" NPT

3" ASME, DN 65 PN 10, JIS 10K 3B ETFE Flange adapter for 2" BSPT

2" BSPT Locknut, plastic

2" NPT Locknut

4" sanitary mounting clamp

Spare Parts

Polycarbonate Lid

Aluminum Lid

Order code

Y15

Article No.

A5E32268616

7ML1930-1AC

7ML1830-1BK

7ML1830-1BT

7ML1830-1BU

7ML1830-1DQ

7ML1830-1DT

7ML1830-1BR

7ML1830-1LG

7ML1830-1LH

¹⁾ Available with Enclosure/cable inlet option 4 only and process connection options A and E only


²⁾ Available with Enclosure/cable inlet options 2 and 4 only

³⁾ Available with Enclosure/cable inlet option 4 only

⁴⁾ Available with Approvals option K only

⁵⁾ Not suitable in Hexane or Ethyl Acetate atmospheres

⁶⁾ Lower temperature rating of these approvals options is limited to -20 °C (-5 °F)


• We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 9/5 in the appendix.

Level Measurement

Point level measurement – Ultrasonic switch

Pointek ULS200


Dimensional drawings

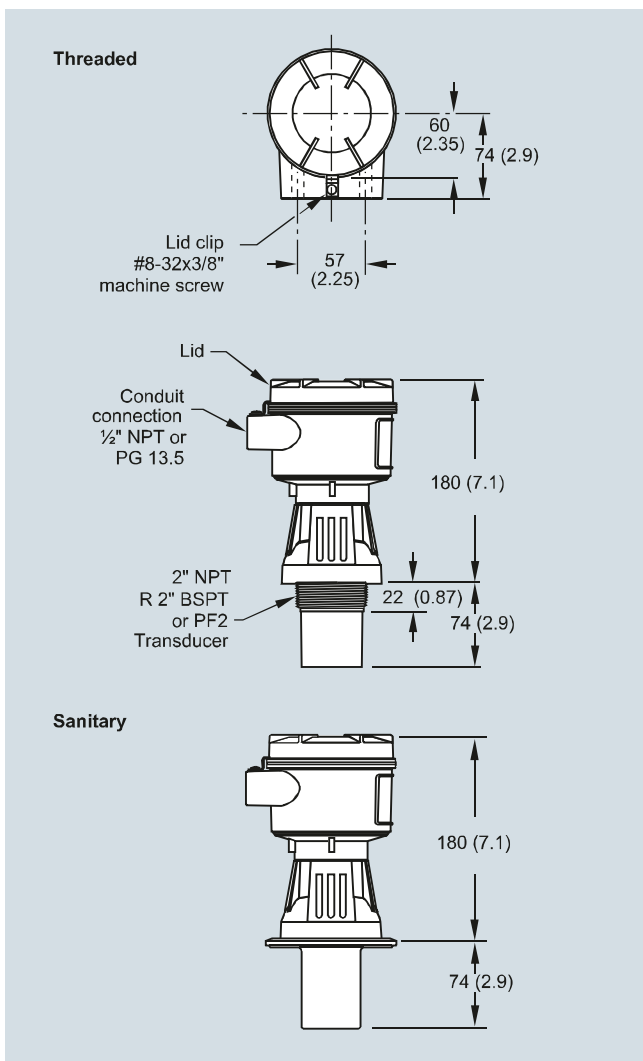


Pointek ULS200, dimensions in mm (inch)

Schematics

Relay output

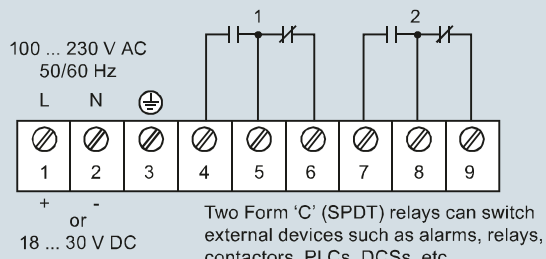

Transistor output: DC version only

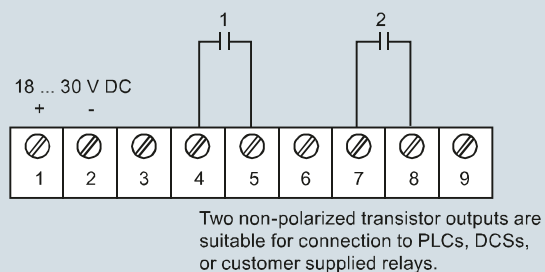

Pointek ULS200 connections

4