

Level Measurement

Point level measurement – Vibrating switches

SITRANS LVS100

Overview



SITRANS LVS100 is a vibrating point level switch for bulk solids.

Benefits

- High resistance to mechanical forces
- Sliding sleeve options for adjustable insertion length and ease of cleaning
- Rotatable enclosure for ease of installation and wiring
- Suitable for point level detection of materials starting at a bulk density of 30 g/l (1.9 lb/ft³)
- Customer desired extensions up to 4 000 mm (157.48 inch)

Application


SITRANS LVS100 detects high, low or demand levels of dry bulk solids in bins, silos or hoppers.

SITRANS LVS100 has a compact design and can be top, side, or angle mounted. The vibrating fork design ensures the tines are kept clean. The unique design of the fork and crystal assembly eliminates false high level readings even if tines become damaged.

A signal from the electronic circuit excites a crystal in the probe causing the fork to vibrate. If the fork is covered by material, the change in vibration is detected by the electronic circuitry which causes the relay to change state after a one second delay. When the fork is free from material pressure, full vibration resumes and the relay reverts to its normal condition.

- Key Applications: dry bulk solids in bins, silos, hoppers

Configuration

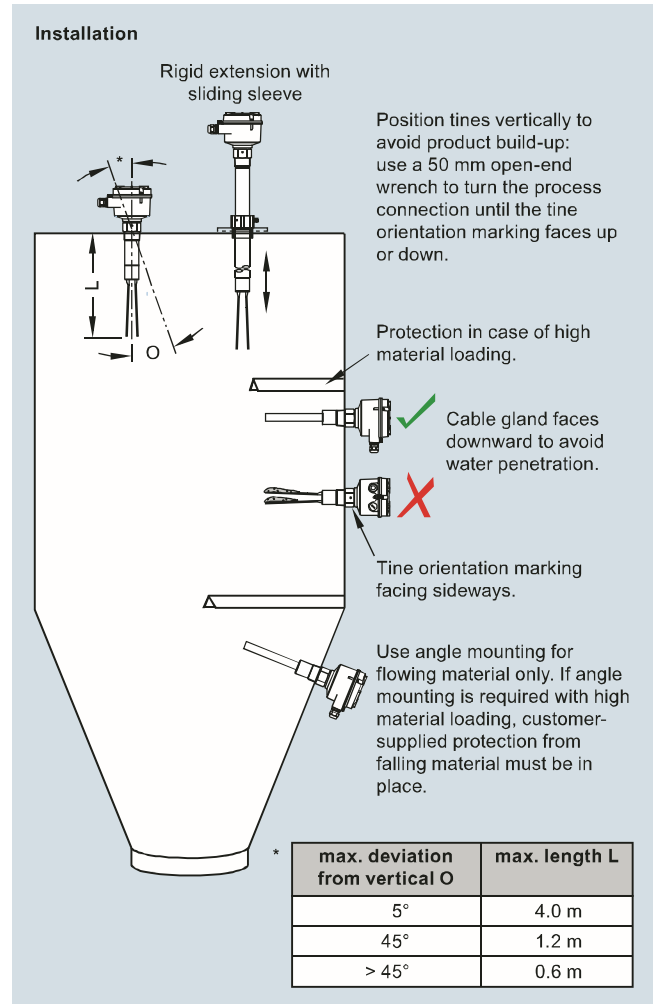

SITRANS LVS100 installation, dimensions in mm (inch)

Level Measurement

Point level measurement – Vibrating switches

SITRANS LVS100

Technical specifications

| Mode of operation | |
|--|---|
| Measuring principle | Vibrating point level switch |
| Input | |
| Measured variable | High, low and demand |
| Measuring frequency | 200 Hz |
| Output | |
| Relays | DPDT relay |
| Relay delay | From loss of vibration: approximately 1 second From resumption of vibration: approximately 1 ... 2 s |
| Signal delay | Probe uncovered to covered: approximately 1 s Probe covered to uncovered: approximately 1 ... 2 s |
| Relay fail-safe | High or low, switch selectable |
| Alarm output | Relay 8 A at 250 V AC, non-inductive Relay 5 A at 30 V DC, non-inductive |
| Sensitivity | |
| | High or low, switch selectable |
| Rated operating conditions | |
| Installation conditions | |
| • Location | Indoor/outdoor |
| Ambient conditions | |
| • Ambient temperature | -40 ... +60 °C (-40 ... +140 °F) |
| • Installation category | III |
| • Pollution degree | 2 |
| Medium conditions | |
| • Process temperature | -40 ... +150 °C (-40 ... +302 °F) |
| • Max. threaded bushing temperature | 60 °C (140 °F) |
| • Max. enclosure surface temperature (Category 2D) | 90 °C (194 °F) |
| • Max. extension surface temperature (Category 1D) | 150 °C (302 °F) |
| • Pressure (vessel) | Max. 10 bar g (145 psi g) European Pressure Directive 97/23/EC: Category 1 |
| Minimum material density | Approx. 30 g/l (1.9 lb/ft ³) |

| Design | |
|----------------------------|--|
| Material | Epoxy coated aluminum |
| • Enclosure | • Thread 1¼" NPT [(Taper), ANSI/ASME B1.20.1], R 1½" [(BSPT), EN 10226] |
| Process connection | • Thread R 1½" [(BSPT), EN 10226], ½" NPT [(Taper), ANSI/ASME B1.20.1], sliding sleeve [min. length 500 mm (19.69 inch)] • Thread material: stainless steel 304 (1.4301) or 316TI (1.4571) depending on configuration |
| Tine material | Stainless steel 316TI (1.4571) |
| Degree of protection | IP66/Type 4/NEMA 4 |
| Conduit entry | 2 x M20x1.5 or 2 x ½" NPT |
| Weight | Standard version, no extensions: approx 1.7 kg (3.7 lb) |
| Power supply | |
| | • 19 ... 230 V AC, +10 %, 50 ... 60 Hz, 8 VA • 19 ... 40 V DC, +10 %, 1.5 W |
| Certificates and approvals | |
| | • CSA/FM General Purpose • CE • CSA/FM Dust Ignition Proof • C-TICK • ATEX II 1/2 D • IECex |

Level Measurement


Point level measurement – Vibrating switches

SITRANS LVS100

| Selection and Ordering data | Article No. |
|--|---|
| SITRANS LVS100, standard Vibrating point level switch for high or low level detection of bulk solids. Sensitivity > 30 g/l. | 7ML5735- - 0 - A 0 |
| Input Voltage DPDT Relay - 19 ... 230 V AC, 19 ... 40 V DC DPDT Relay - 19 ... 230 V AC, 19 ... 40 V DC (stocked version) ¹⁾ | 1 2 |
| Process temperature Up to 150 °C (302 °F) | A |
| Process connection <u>Threaded</u> R 1½" [(BSPT), EN 10226] 1¼" NPT [(Taper), ANSI/ASME B1.20.1] R 1½" [(BSPT), EN 10226] DIN 2999 thread, sliding sleeve - min. length 500 mm (19.69 inch) ²⁾ 1½" NPT [(Taper), ANSI/ASME B1.20.1], sliding sleeve [min. length 500 mm (19.69 inch)] ²⁾ | A B C D |
| Extension length <u>Stainless steel 316TI (1.4571)</u> Standard length, 170 mm (6.69 inch) <u>Add Order code Y01 and plain text:</u> <u>"Insertion length ... mm"</u> <u>Stainless steel 304 (1.4301)</u> • 300 ... 500 mm (11.81 ... 19.69 inch) • 501 ... 1 000 mm (19.72 ... 39.37 inch) • 1 001 ... 1 500 mm (39.41 ... 59.06 inch) • 1 501 ... 2 000 mm (59.09 ... 78.74 inch) • 2 001 ... 2 500 mm (78.78 ... 98.43 inch) • 2 501 ... 3 000 mm (98.46 ... 118.11 inch) • 3 001 ... 3 500 mm (118.15 ... 137.80 inch) • 3 501 ... 4 000 mm (137.83 ... 157.48 inch) | 11 12 13 14 15 16 17 18 20 |
| Approvals CSA/FM General Purpose, CE, C-TICK CSA/FM Class II, Div. 1, Group E, F, G, Class III, ATEX II 1/2 D, C-TICK IEC-Ex t IIIC Da/Db | A B C |


¹⁾ Only available with the following configurations 7ML5735-2AA11-0AA0 or 7ML5735-2AB11-0AA0
²⁾ Not available with extension length options 11, 12

Dimensional drawings

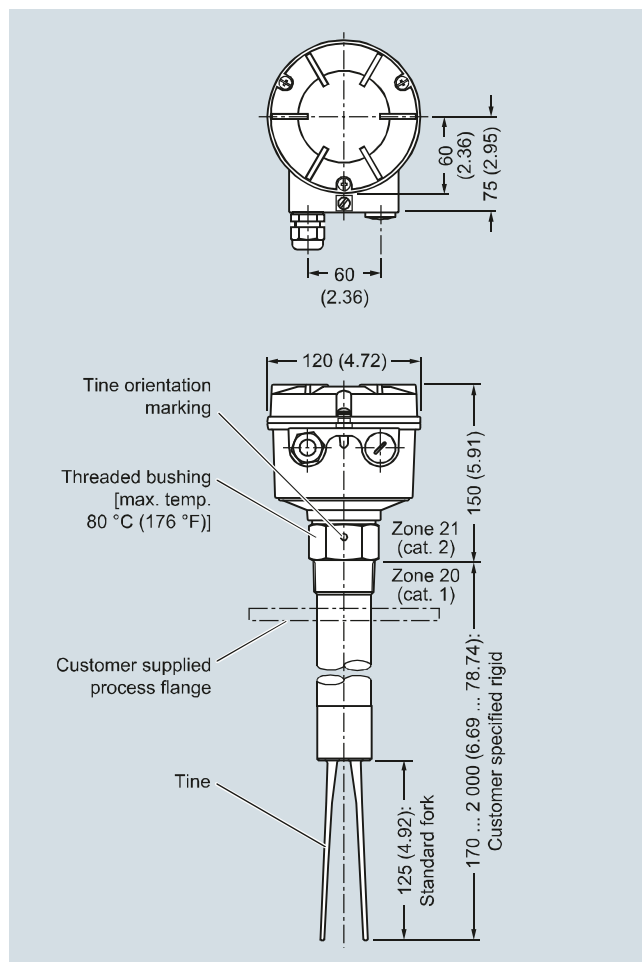

SITRANS LVS100, dimensions in mm (inch)

Schematics

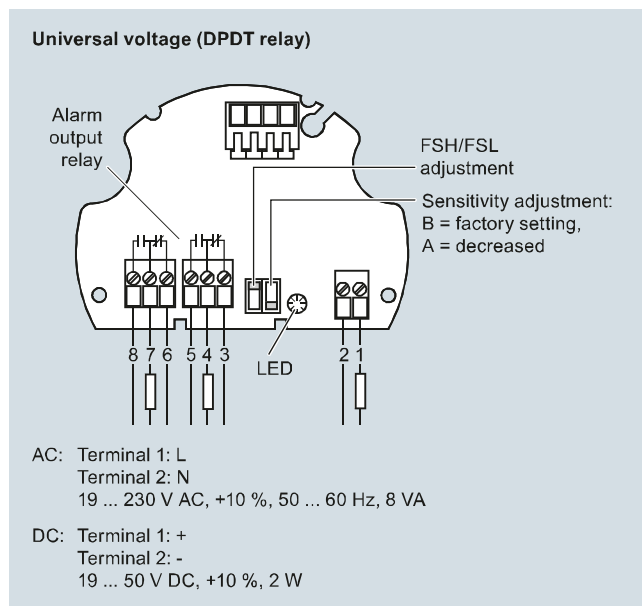

SITRANS LVS100 connections

| Selection and Ordering data | Order code |
|--|--|
| Further Designs Please add '-Z' to Article No. and specify Order code(s). Total insertion length: Enter the total insertion length in plain text description, max. (50 mm increments) Signal bulb inserted in M20 cable gland ¹⁾ | Y01 A20 |
| Operating Instructions Multi-language This device is shipped with the Siemens Milltronics manual DVD containing the ATEX Quick Start and Operating Instructions library. | Article No. 7ML1998-5FT63 |
| Spare Parts Replacement Electronics Module LVS100 DPDT Relay (19 ... 253 V AC, 19 ... 55 V DC) R 1½" [(BSPT), EN 10226] DIN 2999 thread, sliding sleeve 1½" NPT [(Taper), ANSI/ASME B1.20.1], sliding sleeve [min. length 500 mm (19.69 inch)] | 7ML1830-1NS 7ML1830-1NT 7ML1830-1NU |

¹⁾ Available only with approval CE
• We can offer shorter delivery times for configurations designated with the Quick Ship Symbol. For details see page 9/5 in the appendix.